

Accurate Manufactured Products Group

A USA Manufacturer of Specialty Fastener and Industrial Products

SEX BOLTS & MATING FASTENERS

8090 Woodland Drive • Indianapolis, IN 46278 • Tel: 317-472-9000 • Fax: 317-472-9010 Email: sales@ampg.com • Website: www.ampg.com



Introduction to Sex Bolts & Mating Fasteners

What They Are....

Sex Bolts are mating fasteners a barrel with an internal thread, and a male screw. They were originally designed to clamp material between the head of the barrel and the head of the screw, or to bridge the gap between 2 parts, like going through a hollow door.

• Fence Systems

Glass Fastening

Hurricane Protection

• Furniture

Hand Rails

Hinge Pins

• Helmets

• HVAC

Kayaks

Knives

Lock SetsLockers

Panic Bars

• Plumbing

Museum Exhibits

• Orthopedic Braces

• Playground Equipment

Plexiglass Fastening

Gates

Common Names For Mating Fasteners...

Sex Bolts—Architectural Bolts—Chicago Screws—Binding Posts— Post & Screw—Internal Thread Mating Fastener—Threaded Rivets

Uses For Sex Bolts...

- Acrylic fastening
- Air Hoods
- Aquariums
- Automotive aftermarket
- Awnings
- Bathroom Partitions
- Belts
- Bindery—Publishing
- Bleachers
- Boats
- Body Armor
- Bullet Proof Glass—joins the panels
- Buses
- Cabinetry
- Construction
- Display Fixtures
- Doors
- Exhibits

Variations....

Accurate has 15 years of experience in manufacturing these mating parts. We can make all sizes and head styles in house. We work in most materials available in bar form. Our specialized machinery and processes allow us to produce small quantity and production quantity runs.

See page A7 for help in ordering your custom part, and use one of our new SPECIAL SEX BOLT ORDER FORMS on pages A8-A13.

- Power Tool Manufacturing
 - Railings for buildings
 - Range Hoods
 - RV Manufacturing
 - Saddlebags on Motorcycles
 - Seating
 - Sheet Metal fastening
 - Shutters
 - Signs
 - Spear Guns
 - Stage Production and Lighting
 - Stadiums
 - Store Fixtures
 - Taxidermy
 - Trains
 - Water Fountains
 - Windshields
 - & Many More



Group

SPECIAL ORDERS AVAILABLE— Small Quantities to Large Volume



A2

Sex Bolts & Mating Fasteners

Pictorial Guide to Sex Bolts



Architectural Style Smooth Head Brass, Stainless, Aluminum, Steel Pages A14-17



One-Way Tamperproof Style Stainless Steel Pages A28-29



Low Profile Socket Drive Style Stainless Steel Pages A34-35



Slotted Flat Head Style 82 Degree Countersunk Head Steel, Stainless Steel, Brass Page A47



Hex Head Sex Bolts Stainless Steel Page A48



Combo Head Style Slotted/Phillips Head Steel Zinc & Stainless Pages A18-23



Button Head Socket Drive Style Stainless Steel Page A30-31



Binding Posts — Chicago Screws Aluminum, Stainless Steel, Brass, Copper, Plastic Pages A36-45



Slotted Oval Head & Grommet Nuts Steel & Stainless Steel Page A47



T Head Binding Posts Aluminum Page A48



Tamperproof Security Style 6 Lobe Drive with Security Pin Stainless Steel Pages A24-27



Flat Head Socket Drive Style Stainless Steel Page A32-33



Slotted Truss Head Style Brass, Stainless Steel, Aluminum Page A46



Phillips Oversize Truss Head Style Serrated under head Stainless Steel & Steel Page A48



Connector Nuts & Bolts Steel, Brass, Aluminum Page A49

SPECIAL ORDERS AVAILABLE— Small Quantities to Large Volume





Phone: 317-472-9000 • FAX: 317-472-9010 • email: sales@ampg.com • www.ampg.com

Technical Guide to Sex Bolts

The most important criteria are:

1. BARREL DIAMETER— These bolts often are going through pre-drilled holes, and need to be able to fit. The barrel diameter should be slightly less than the hole diameter.

2. BARREL LENGTH—This is the length measured from underneath the head to the end of the barrel. *Normally the length of the barrel is shorter than the thickness of the material you are going through.*

3. THREAD SIZE—What size threads are in the barrel, and how much depth is required. The more thread depth, the more difficult these parts are to manufacture, and the more expensive.

The "grip range", is the maximum thickness of the material that may be clamped between the male screw and the female sex bolt. Use a shorter male screw to avoid going too deep into the threads in the female barrel.

4. HEAD TYPE & DRIVE—Most common is a "truss" style head. Other common drive styles are; none, slotted, socket and combo drive.

5. MATERIAL & FINISH—We manufacture Sex Bolts in Steel, Aluminum, Brass, Copper and 18-8 and Type 316 Stainless Steel, available in several platings.


Architectural Series Sex Bolts—Pages A14-17

This is our most popular line of Sex Bolts, and are used mainly to set up door hardware (kickplates, panics bars, door closers, hinges) to doors.

Sex Bolts with a smooth head (and no drive) are knurled under the head, which prevents the female barrel from turning when the screw is tightened from the other side.

Bolts for the three most common door sizes are:

- 1-3/8" Thick Door
- 1-3/4" Thick Door
- 2-1/4" Thick Door
- Use 1-3/16" length Sex Bolt Use 1-9/16" length Sex Bolt Use 2-1/16" length Sex Bolt













A4

SPECIAL ORDERS

AVAILABLE-

Small Quantities to Large Volume

Sex Bolts & Mating Fasteners

Technical Guide to Sex Bolts

Combo Head Style Sex Bolts—Pages A18-23

The most economical solution for mating fasteners. Available from stock in 6-32 thru 5/16-18 sizes, in steel zinc and stainless steel materials. Female Barrels and Male screws and shoulder bolts are sold separately. Our male screws are manufactured to match the female barrels, and our male shoulder screws also match both the barrel and head dimensions. To properly identify the part we need the barrel diameter and length of the barrel from underneath the head.

Tamperproof Security Sex Bolts—Pages A24-27

Available from our stock in 10-24 and 1/4-20 sizes - 1/4" and 5/16" barrels. Our 6 Lobe with security pin drive allows for more secure and powerful driving without any cam out or head distortion. Female barrels are sold separately, and we also stock matching shoulder bolts and machine screws with matching dimensions.

One Way Partition Sex Bolts—Pages A28-29

These are the standard sex bolts used for bathroom partitions. Manufactured in Stainless Steel, and with standard one way tamperproof drives. Both the male and female sides have matching shoulders, and these are usually specified with a shoulder length for both male and female portions.

Socket Drive Barrel Bolts—Pages A30-35

82 Degree Flat Head Barrel Bolts can be flush mounted for a finished appearance. Button Head have an industrial finished appearance. The socket drive in both styles allows for quick and efficient tightening with standard Hex Keys.

Binding Posts—Pages A36-45

These are the standard sex bolts developed originally for the printing industry, and used to bind catalogs together. Standard size is the 8-32 with .203" diameter barrel. We also stock the non-standard Stainless Steel, Brass and Copper items, for when increased strength or a different look is needed.

Slotted Truss Head Sex Bolts—Pages A46

Steel, Brass, Stainless Steel, and Aluminum are the materials we stock for these. Screw driver slot allows quick installation. Large heads have a finished appearance.

















Technical Guide to Sex Bolts

Slotted Flat Head Sex Bolts—Pages A47

82 Degree Slotted Flat Head Barrel Bolts can be flush mounted for a finished appearance. The screw driver slot allows for quick tightening. Stocked in Steel, Brass and Stainless materials.

Slotted Oval Head Sex Bolts—Pages A47

82 Degree Slotted Oval Head Barrel Bolts are mounted in countersunk holes for a finished decorative appearance. The screw driver slot allows for quick tightening. Stocked in Steel, and Brass materials.

Grommet Nuts—Pages A47

Originally designed for hinges (Full surface, Half surface, and Half mortise) they are also commonly used in the Display and Fixture industry. Slotted head is for quick and easy installation. The no slot (no drive) head is for tamperproof and secure applications, and the open head allows for infinite adjustment of the male mating screw.

Phillips Oversize Truss Head Sex Bolts—Pages A48

Oversize heads come with a Phillips drive. Serrations under the head aid in preventing turning and loosening from vibration. Stainless Steel and Steel with Chrome plating available.

Hex Head Sex Bolts—Pages A48

One of our strongest styles. Manufactured in 18-8 Stainless Steel for maximum corrosion resistance. Hex head allows for wrench tightening, and presents a substantial industrial look. Excellent strength characteristics.

T Head Binding Posts—Pages A48

Specially designed for use in slotted materials. Insert the thin end and then rotate for placement. Used in display fixtures and other commercial applications.

Connector Nuts & Bolts—Pages A49

The most commonly used nut in the furniture industry. Manufactured in steel, with the following finishes: plain, black, bronze, nickel, brass, and silver.













SPECIAL ORDERS AVAILABLE— Small Quantities to Large Volume






Sex Bolts & Mating Fasteners

Ordering Special Sex Bolts

Accurate specializes in manufacturing small quantities of special sex bolts with a quick turn-around. We also make it as simple as possible for you to place an order or get a custom item quoted quickly-To order or request a quote for a special order, fill out one of the special order forms on pages vi-xi, then cut it out and Fax to 317-472-9010. (Don't forget to make a copy of the blank form, for future use, before filling it out)

	Custom Bolt Type	Order Form
(Architectural Series Sex Bolt	Form SB-1
	Combo Head Sex Bolt	Form SB-2
	Tamper Proof Sex Bolt	Form <mark>SB-2</mark>
	Socket Drive Sex Bolt (Button Head)	Form <mark>SB-2</mark>
	Slotted Truss Head Sex Bolts	Form SB-2
-	Phillips Truss Head Sex Bolts	Form SB-2
-	Grommet Nuts	Form SB-2
8	Socket Drive Sex Bolt (Flat Head)	Form SB-3
-1	Slotted Flat Head Sex Bolts	Form SB-3
(Binding Post	Form SB-4
	Slotted Oval Head Sex Bolts	Form SB-5
6	Hex Head Sex Bolts	Form SB-6

If, while filling in the order form, you have dimensions that are not critical, just write "standard" rather than a size. For example, if you need a sex bolt with a 1/2" Barrel Diameter, but the Head Diameter is not critical and does not need to be any special size, write "standard" for Head Diameter and we'll us the standard head size that would normally correspond to a 1/2" Barrel Diameter.

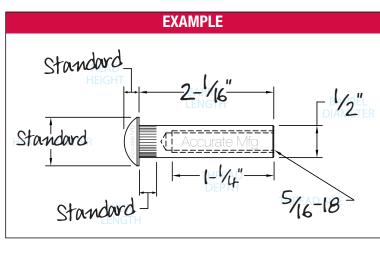



SPECIAL ORDERS AVAILABLE-Small Quantities

to Large Volume



	Name:	
GRDER FOR:	Company:	
	Address:	
QUANTITY:	City:	State: Zip:
Phone #:	Email Address:	
HEA HEIG HEAD DIAMETER		BARREL DIAMETER

Materials

Platings



FAX TO: 317-472-9010



Phone: 317-472-9000 • FAX: 317-472-9010 • email: sales@ampg.com • www.ampg.com

Special Sex Bolt Order Form SB-2



TRUSS HEAD SEX BOLTS

QUOTE FOR:	Name:	
ORDER FOR:	Company:	
QUANTITY: Phone #:	Address: City: Email Address:	State: Zip:
FILL IN YOUR DIMENSIONS-write	e directly over light blue type*write clearly and l	egibly
HEAD HEAD DIAMETER		BARREL DIAMETER
DRIVE STYLE:	SLOTTED 6-LOBE w/PIN HEAD (Tamperproof)	SOCKET PHILLIPS DRIVE HEAD
Materials 12L14 Low Carbon Steel 300 Series Stainless Steel 18-8 Stainless Steel Type 316 Stainless Steel Commercial Brass Other	Platings Chrome Plated Dark Bronze Zinc Plating Passivation Other	NOTES
		FAX TO: 317-472-9010



Phone: 317-472-9000 • FAX: 317-472-9010 • *email: sales@ampg.com* • www.ampg.com



FLAT HEAD SEX BOLTS

QUOTE FOR:	Name:		
ORDER FOR:	Company:		
	Address:		
QUANTITY:	City:	State	Zip:
Phone #:	– Email Address:		
FILL IN YOUR DIMENSIONS-wri	te directly over light blue type*w	ite clearly and legibly	
THREAD SIZE BARREL DIAMETER	BARREL LENGTH HEAD HEIGHT THREAD DEPTH Accurate Mfg	HEAD	
		OBE W/PIN SOCKE	
* Light Blue Type will not appear once form is faxed.	HEAD HEAD (Tar	nperproof) DRIVE	HEAD
Materials 12L14 Low Carbon Steel 300 Series Stainless Steel 18-8 Stainless Steel Type 316 Stainless Steel Commercial Brass Other	Platings Chrome Plated Dark Bronze Zinc Plating Passivation Other		
FAX TO: 317-472-9010)		
ione: 317-472-9000 • FAX: 317-472	2-9010 • email: sales@ampg.com	• www.ampg.com	Accurate Manufactu

A10 Ph

red Products Group

 \checkmark

; о<u>:</u>b

Special Sex Bolt Order Form SB-4

Group



BINDING POSTS Name: ORDER FOR: Company: Address: QUANTITY: _____ City:_____ State:____ Zip:____ Phone #: _____ Email Address: _____ FILL IN YOUR DIMENSIONS—write directly over light blue type*—write clearly and legibly curate Mitc -THREAD SIZE **HEAD STYLE:** * Light Blue Type will not appear once form is faxed. **Materials** NOTES **Platings** □ 12L14 Low Carbon Steel Chrome Plated □ 300 Series Stainless Steel Dark Bronze □ 18-8 Stainless Steel □ Zinc Plating Type 316 Stainless Steel Passivation Commercial Brass Other Black Plastic U White Plastic Other FAX TO: 317-472-9010 Accurate Phone: 317-472-9000 • FAX: 317-472-9010 • email: sales@ampg.com • www.ampg.com Manufactured Products



OVAL HEAD SEX BOLTS

A12

QUOTE FOR:	Name:	
ORDER FOR:	Company:	
	Address:	
QUANTITY:	City:	State: Zip:
Phone #:	Email Address:	
FILL IN YOUR DIMENSIONS-write	e directly over light blue type*write clearly and leg	jibly
HEAD HEAD ANGLE DIAMETER	OVERALL LENGTH THREAD DEPTH DEPTH Accurate Mfg BARREL LENGTH THREAD	SIZE
· · · · · · · · · · · · · · · · · · ·	DRIVE TYLE: COMBO HEAD SLOTTED HEAD COMBO HEAD COMBO HEAD COMBO HEAD	
Materials 12L14 Low Carbon Steel 300 Series Stainless Steel 18-8 Stainless Steel Type 316 Stainless Steel Commercial Brass Other	 Chrome Plated Dark Bronze Zinc Plating Passivation Other 	NOTES
FAX TO: 317-472-9010		
Phone: 317-472-9000 • FAX: 317-472	2-9010 • <i>email: sales@ampg.com</i> • www.ampg.co	m Accurate Manufactured Products Group

і. 0:́о

Special Sex Bolt Order Form SB-6



HEX HEAD SEX BOLTS

0:0

QUOTE FOR:	Name:	
GRDER FOR:	Company:	
	Address:	
QUANTITY:	City:	State: Zip:
Phone #:	Email Address:	
FILL IN YOUR DIMENSIONS-WI	ite directly over light blue type*—write cle	early and legibly
BARREL DIAMETER THREAD SIZE	BARREL LENGTH THREAD DEPTH	HEAD HEIGHT
DRIVE STYLE * Light Blue Type will not appear once form is faxed.	COMBO SLOTTED 6-I	LOBE w/PIN SOCKET PHILLIPS mperproof) DRIVE HEAD
Materials 12L14 Low Carbon Steel 300 Series Stainless Steel 18-8 Stainless Steel Type 316 Stainless Steel Commercial Brass Other	Platings Chrome Plated Dark Bronze Zinc Plating Passivation Other	NOTES
Accurate		FAX TO: 317-472-9010
Manufactured Phone Products Group	: 317-472-9000 • FAX: 317-472-9010 •	 email: sales@ampg.com • www.ampg.com

÷

Architectural Series Sex Bolts

Architectural Sex Bolts have smooth Truss Heads-no drive. The

screw is tightened from the other side. These parts are secure as there is no way to turn the sex bolt without a drive in the head.

Architectural Sex Bolts are available in a variety of materials and finishes. Materials include Brass, Steel, Aluminum, 18-8 Stainless Steel, & Type 316 Stainless Steel. Available platings include

Mating screw is Phillips flat head, steel, and plated to match the finish on the sex bolt. Stainless Sex Bolts have Stainless screws.

Priced by the set—(1) female sex bolt and (1) male Phillips flat

Architectural Sex Bolts have many applications, but are most often used to attach door hardware (kickplates, panics bars, door closers, hinges) to doors. When used in a hollow door they provide

strength, security, and easy assembly from the other side.

head screw—or you can order only the female bolt.

Chrome, Brass, Dark Bronze, & Zinc.

 Door and Lock Accessory mounts Hurricane Protection Shutters

• Architectural products - Railings, Cabinetry,

HVAC ventilation installations are also good uses

• Elevator Protection Gates

Shutters, Seats, and more,

Some uses are:








See chart on facing page for available sizes and order numbers




SPECIAL ORDERS AVAILABLE— Small Quantities to Large Volume



for Sex Bolts. They provide a strong, secure, easy to assemble, and good looking solution for many sheet metal anchoring applications.


















Architectural Series Sex Bolts

USAMADE

Are	chitec	tural S	Series S	Sex Bo	olts	BRAS	S MATERI	AL	
D	В	С	A	F	E			Set	Female
Barrel	Barrel	Thread	Head	Head	Thread		Mating	Order	Bolt
Diameter	Length	Depth	Diameter	Height	Size	Plating	Screw	Number	Only
	1-3/16"	5/8"	1/2"	1/8"	8-32	Chrome	8-32 x 1"	Z4870	Z4870-1E
	1-3/16"	5/8"	1/2"	1/8"	8-32	Brass	8-32 x 1"	Z4872	Z4870-1A
	1-3/16" 1-/9/16	5/8" 5/8	1/2" 1/2	1/8" 1/8	8-32 8-32	Dark Bronze Chrome	8-32 x 1" 8-32 x 1"	Z4874 Z4880	Z4874-1E Z4880-1E
	1-/9/16	5/8	1/2	1/8	8-32 8-32	Brass	8-32 x 1"	Z4880 Z4882	Z4880-1E
1/4	1-/9/16	5/8	1/2	1/8	8-32	Dark Bronze	8-32 x 1"	Z4884	Z4884-1E
	2	5/8	1/2	1/8	8-32	Chrome	8-32 x 1"	Z4887	Z4887-1E
	2	5/8	1/2	1/8	8-32	Brass	8-32 x 1"	Z4891	Z4887-1A
	3	5/8	1/2	1/8	8-32	Chrome	8-32 x 1"	Z4888	Z4888-1E
	3	5/8	1/2	1/8	8-32	Brass	8-32 x 1"	Z4892	Z4888-1A
D	В	С	A	F	E			Set	Female
Barrel	Barrel	Thread	Head	Head	Thread		Mating	Order	Bolt
Diameter	Length	Depth	Diameter	Height	Size	Plating	Screw	Number	Only
	1-3/16 1-3/16	3/4 3/4	1/2 1/2	1/8 1/8	10-32 10-32	Chrome Brass	10-32 x 1 10-32 x 1	Z5000 Z5005	Z5000-1E Z5000-1A
	1-3/16	3/4	1/2	1/8	10-32	Dark Bronze	10-32 x 1	Z5005 Z5010	Z5000-1A
	1-9/16	3/4	1/2	1/8	10-32	Chrome	10-32 x 1	Z5100	Z5100-1E
	1-9/16	3/4	1/2	1/8	10-32	Brass	10-32 x 1	Z5105	Z5100-1A
	1-9/16	3/4	1/2	1/8	10-32	Dark Bronze	10-32 x 1	Z5110	Z5110-1E
	2	3/4	1/2	1/8	10-32	Chrome	10-32 x 1	Z5102	Z5102-1E
	2	3/4 3/4	1/2 1/2	1/8 1/8	<u>10-32</u> 10-32	Brass Chrome	10-32 x 1 10-32 x 1	Z5101 Z5103	Z5105-1A Z5103-1E
5/16	3	3/4	1/2	1/8	10-32	Brass	10-32 x 1	Z5103	Z5103-1L
0/10	1-3/16	3/4	1/2	1/8	12-24	Chrome	12-24 x 1	Z5115	Z5115-1E
	1-3/16	3/4	1/2	1/8	12-24	Brass	12-24 x 1	Z5116	Z5115-1A
	1-3/16	3/4	1/2	1/8	12-24	Dark Bronze	12-24 x 1	Z5117	Z5117-1E
	1-9/16	3/4	1/2	1/8	12-24	Chrome	12-24 x 1	Z5120	Z5120-1E
	1-9/16 1-9/16	3/4 3/4	1/2 1/2	1/8 1/8	12-24 12-24	Brass Dark Bronze	12-24 x 1 12-24 x 1	Z5121 Z5122	Z5120-1A Z5122-1E
	2-1/16	3/4	1/2	1/8	12-24	Chrome	12-24 x 1	Z5122 Z5315	Z5315-1E
	2-1/16	3/4	1/2	1/8	12-24	Brass	12-24 x 1	Z5316	Z5315-1A
	2-1/16	3/4	1/2	1/8	12-24	Dark Bronze	12-24 x 1	Z5317	Z5317-1E
D	B	C	A	F	_ E .			Set	Female
Barrel Diameter	Barrel	Thread	Head	Head	Thread	Plating	Mating Screw	Order Number	Bolt
Diameter	Length 3/4	Depth 1/2	Diameter 9/16	Height 5/32	Size 1/4-20	Chrome	1/4-20 x 1/2"	Z5150	Only
	3/4	1/2	9/16	5/32	1/4-20	Brass	1/4-20 x 1/2"	Z5155	_
	1	5/8	9/16	5/32	1/4-20	Chrome	1/4-20 x 1/2"	Z5151	_
	1	5/8	9/16	5/32	1/4-20	Brass	1/4-20 x 1/2"	Z5156	_
	1-3/16	3/4	9/16	5/32	1/4-20	Chrome	1/4-20 x 1-1/2"	Z5152	_
	<u>1-3/16</u> 1-9/16	3/4	<u>9/16</u> 9/16	5/32 5/32"	<u>1/4-20</u> 1/4-20	Brass Chrome	1/4-20 x 1-1/2" 1/4-20 x 1-1/2"	Z5157 Z5200	 Z5200-1E
3/8	1-9/16	1-1/4	9/16	5/32	1/4-20	Brass	1/4-20 x 1-1/2"	Z5200	Z5200-1E
5/0	1-9/16	1-1/4	9/16	5/32	1/4-20	Dark Bronze	1/4-20 x 1-1/2"	Z5210	Z5210-1E
	2-1/16	1-1/4	9/16	5/32	1/4-20	Chrome	1/4-20 x 1-1/2	Z5300	Z5300-1E
	2-1/16	1-1/4	9/16	5/32	1/4-20	Brass	1/4-20 x 1-1/2	Z5305	Z5300-1A
	2-1/16	1-1/4	9/16	5/32	1/4-20	Dark Bronze	1/4-20 x 1-1/2	Z5310	Z5310-1E
	3	3/4	9/16	5/32	1/4-20	Chrome	1/4-20 x 1-1/2	Z5301	Z5301-1E
D	3 B	3/4 C	9/16 A	5/32 F	1/4-20 E	Brass	1/4-20 x 1-1/2	Z5302 Set	Z5301-1A Female
Barrel	Barrel	Thread	Head	Head	Thread		Mating	Order	Bolt
Diameter	Length	Depth	Diameter	Height	Size	Plating	Screw	Number	Only
	2-1/16	1-1/4	3/4	3/16	5/16-18	Chrome	5/16-18 x 1-1/2	Z5400	Z5400-1E
4.10	2-1/16	1-1/4	3/4	3/16	5/16-18	Brass	5/16-18 x 1-1/2	Z5405	Z5400-1A
1/2	2-1/16	1-1/4	3/4	3/16	5/16-18	Dark Bronze	5/16-18 x 1-1/2	Z5410	Z5410-1E
	3	3/4	3/4	3/16	5/16-18	Chrome	5/16-18 x 1-1/2	Z5401	Z5401-1E
	3	3/4	3/4	3/16	5/16-18	Brass	5/16-18 x 1-1/2	Z5402	Z5401-1A



4









Sex Bolts & Mating Fasteners

+)

Architectural Series Sex Bolts





See chart on facing page for available sizes and order numbers

When joining two pieces of material together, Sex Bolts provide a versatile and stable fastener. The domed side is used in security applications, as there is no way to turn the smooth head of the Sex Bolt. A hole drilled thru the 2 materials being fastened is a safe and convenient method of joining. Our large selection of head styles, sizes, and materials makes for a custom look at an in-stock price and delivery.


This example shows a bulletproof glass installation at a bank. The sex bolts present a beautiful and finished look with a strong mechanical joint. The all metal joint protects the glass.

Marine applications are a common use for our 18-8 and Type 316 Stainless Steel Sex Bolts. Docks and construction projects in both fresh and salt water areas use these. Many boat manufacturers use these for attaching accessories both above and below the water line. Sex Bolts are particularly useful in fiberglass marine applications, as they take much of the stress away from the fiberglass.













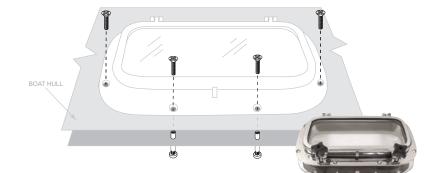



Small Quantities to Large Volume





Architectural Series Sex Bolts

USA SMADE

Are	chitect	ural S	eries S	ex Bo	lts	STEEL		۸L	
D	В	С	A	F	E			Set	Female
Barrel	Barrel	Thread	Head	Head	Thread		Mating	Order	Bolt
Diameter	Length	Depth	Diameter	Height	Size	Plating	Screw	Number	Only
	1-3/16"	3/4"	9/16"	5/32"	1/4-20	None	None	-	Z5214
0/0	1-7/8	3/4	9/16	5/32	1/4-20	Zinc	None	—	Z5201
3/8	1-9/16	1	9/16	5/32	1/4-20	Zinc	1/4-20 x 1"	Z5215	Z5215-1E
	1-9/16	1	9/16	5/32	1/4-20	Chrome	1/4-20 x 1-1/2	Z5216	Z5216-1E
	1-9/16	1	9/16	5/32	1/4-20	Brass	1/4-20 x 1-1/2	Z5217	Z5217-1E
	chitect					18-8 S	TAINLESS	STEE	L
D	В	С	A	F	E			Set	Female
Barrel	Barrel	Thread	Head	Head	Thread		Mating	Order	Bolt
Diameter	Length	Depth	Diameter	Height	Size	Plating	Screw	Number	Only
	1-3/16" 1-9/16	5/8" 5/8	1/2" 1/2	1/8" 1/8	8-32 8-32	None None	8-32 x 7/8"	Z4876 Z4886	Z4876-1 Z4886-1
1/4	2	5/8	1/2	1/8	8-32 8-32	None	8-32 x 7/8 8-32 x 7/8	Z4889	Z4889-1
	3	5/8	1/2	1/8	8-32	None	8-32 x 7/8	Z4890	Z4890-1
		0.0	=		0.02		0.02 x 110		
	1-3/16	3/4	1/2	1/8	10-32	None	10-32 x 1	Z5025	Z5025-1
	1-9/16	3/4	1/2	1/8	10-32	None	10-32 x 1	Z5125	Z5125-1
	2	3/4	1/2	1/8	10-32	None	10-32 x 1	Z5126	Z5126-1
5/16	3	3/4	1/2	1/8	10-32	None	10-32 x 1	Z5127	Z5127-1
0/10	1 2/40	2/4	1/0	1/0	10.04	Narr	10.044	75400	75400 4
	1-3/16 1-9/16	3/4 3/4	1/2 1/2	1/8 1/8	12-24 12-24	None None	12-24 x 1 12-24 x 1	Z5128 Z5129	Z5128-1 Z5129-1
	2-1/16	3/4 3/4	1/2	1/8	12-24	None	12-24 x 1 12-24 x 1	Z5129 Z5130	Z5129-1 Z5130-1
	2 1/10		1/2		12-27	- Hone		20100	20100-1
	3/4"	1/2"	9/16"	5/32"	1/4-20	None	1/4-20 x 1	Z5140	Z5220-1
	1	5/8	9/16	5/32	1/4-20	None	1/4-20 x 7/8	Z5221	Z5221-1
	1-3/16	3/4	9/16	5/32	1/4-20	None	1/4-20 x 1	Z5142	Z5222
3/8	1-9/16	3/4	9/16	5/32	1/4-20	None	1/4-20 x 1	Z5225	Z5225-1
	2-1/16	3/4	9/16	5/32	1/4-20	None	1/4-20 x 1	Z5325	Z5325-1
	3	3/4	9/16	5/32	1/4-20	None	1/4-20 x 1-1/2	Z5326	Z5326-1
	4	3/4	9/16	5/32	1/4-20	None	1/4-20 x 1-1/2	Z5327	Z5327-1
	1-9/16	3/4	3/4	3/16	5/16-18	None	5/16-18 x 1	Z5234	Z5234-1
4/0	1-3/4	3/4	3/4	3/16	3/8-16	None	3/8-16 x 1	Z5235	Z5235-1
1/2	2-1/16	3/4	3/4	3/16	5/16-18	None	5/16-18 x 1-1/2	Z5425	Z5425-1
	3	3/4	3/4	3/16	5/16-18	None	5/16-18 x 1-1/2	Z5426	Z5426-1
Ar	chitect	ural S	eries S	ex Bo	lts	316 ST	TAINLESS	STEEL	-
D	В	С	A	F	E			Set	Female
Barrel	Barrel	Thread	Head	Head	Thread		Mating	Order	Bolt
Diameter	Length	Depth	Diameter	Height	Size	Plating	Screw	Number	Only
	1-3/16"	5/8"	1/2"	1/8"	8-32	None	8-32 x 3/4"	Z5180	Z4877
1/4	1-9/16	5/8	1/2	1/8	8-32	None	8-32 x 3/4	Z5181	Z4885
1/4	2	5/8	1/2	1/8	8-32	None	8-32 x 3/4	Z5182	Z4893
	3	5/8	1/2	1/8	8-32	None	8-32 x 3/4	Z5183	Z4894
	1-3/16	3/4	1/2	1/8	10-32	None	10-32 x 1	Z5190	Z5024
FIAA	1-9/16	3/4	1/2	1/8	10-32	None	10-32 x 1	Z5190	Z5124
5/16	2	3/4	1/2	1/8	10-32	None	10-32 x 1	Z5192	Z5131
	3	3/4	1/2	1/8	10-32	None	10-32 x 1	Z5193	Z5132
	3/4	1/2	9/16	5/32	1/4-20	None	1/4-20 x 1/2	Z5194	Z5219
	1	5/8	9/16	5/32	1/4-20	None	1/4-20 x 1/2	Z5195	Z5223
3/8	1-3/16	3/4	9/16	5/32	1/4-20	None	1/4-20 x 1-1/2	Z5196	Z5224
0.0	1-9/16	3/4	9/16	5/32	1/4-20	None	1/4-20 x 1-1/2	Z5197	Z5197-1
	2-1/16	3/4	9/16	5/32	1/4-20	None	1/4-20 x 1-1/2	Z5198	Z5198-1
	3	3/4	9/16	5/32	1/4-20	None	1/4-20 x 1-1/2	Z5199	Z5199-1
4/0	2-1/16	3/4	3/4	3/16	5/16-18	None	5/16-18 x 1	Z5206	Z5206-1
1/2	3	3/4	3/4	3/16	5/16-18	None	5/16-18 x 1	Z5207	Z5207-1
				-			-		
5/8	3	1	1	1/4	1/2-13	None	1/2-13 x 1	—	Z5209-1
	1 14 4	ural S	eries S	ex Bo	lts	ALUM	INUM MAT	ERIAL	
Are	chitect								
Are	B	C	A	F	E			Set	Female
D	В	С					Mating	Set Order	Female Bolt
D Barrel	B Barrel	C Thread	Head	Head	Thread	Plating	Mating Screw	Order	Bolt
D	B Barrel Length	C Thread Depth	Head Diameter	Head Height	Thread Size	Plating	Screw	Order Number	Bolt Only
D Barrel	B Barrel	C Thread	Head	Head	Thread	Plating None None	-	Order	Bolt



Sex Bolts &



*Mating Screws are Phillips Flat Head Machine Screws, 18-8 Stainless Steel



Mating Screws are Phillips Flat Head Machine Screws, Type 316 Stainless Steel









л Т

Combo Head Sex Bolts





THE LARGEST SELECTION IN THE WORLD!! The Accurate Combo Head System—"There is a difference"

Our engineers have developed a complete system and a set of standards for "off the shelf" Sex Bolts and Mating Parts. We stock a complete range of female barrels, which can be coupled with either our Shoulder Screws or machine screws.

Benefits:

- Truss Head, combination slotted/Phillips drive
- All components are matched. Heads on both male and female parts are identical.
- Shoulder Screws and Female Barrels allow different grip lengths to be achieved.
- Machine Screws present a finished set appearance.
- · Heads manufactured in accordance with IFI Standards.




Store Fixtures use Sex Bolts everywhere. The finished appearance combined with secure joints and ease of installation make them very popular. Sex Bolts are especially useful and secure for metal tube applications, either round or square, as shown in these illustrations.

BARREL DIAMETER











HREAD DEPTH Combo Drive Truss-Head Barrel & Screw SETS—Zinc-Plated Steel

Combo	Drive Tru	uss-Head	Barrel &	& Screw	Sets	Z	EL				
Barrel Diameter	For Material Thickness (Grip Range)		Material Thickness		Female Barrel	Thread	Male Screw Thread	Replacement Female Barrel	Replacement Male Screw	Quantity of Each	SET ORDEI NUMBER
	Minimum	Maximum	Length	Size	Length	Order Number	Order Number	Part			
	3/8	1/2	3/8	8-32	5/16	Z4437	Z4075	1	Z4437PAK		
13/64"	1/2	5/8	1/2	8-32	5/16	Z4438	Z4075	1	Z4438PAK		
	3/4	7/8	3/4	8-32	5/16	Z4440	Z4075	1	Z4440PA		
	1/4	3/8	1/4	10-24	5/16	Z4404	Z4085	10	Z4404PAK		
	3/8	1/2	3/8	10-24	5/16	Z4404 Z4406	Z4005 Z4085	10	Z4406PA		
	1/2	5/8	1/2	10-24	5/16	Z4408	Z4085	10	Z4408PA		
	5/8	3/4	5/8	10-24	5/16	Z4410	Z4085	10	Z4410PA		
1/4"	3/4	7/8	3/4	10-24	5/16	Z4412	Z4085	10	Z4412PA		
	1	1-1/8	1	10-24	5/16	Z4416	Z4085	10	Z4416PA		
	1-1/4	1-3/8	1-1/4	10-24	5/16	Z4420	Z4085	10	Z4420PA		
	1-1/2	1-5/8	1-1/2	10-24	5/16	Z4424	Z4085	10	Z4424PA		
	2	2-1/8	2	10-24	5/16	Z4432	Z4085	10	Z4432PA		
						_					
	3/8	1/2	3/8	1/4-20	5/16	Z4445	Z4095	10	Z4445PA		
	1/2	5/8	1/2	1/4-20	5/16	Z4443	Z4095	10	Z4443PAI		
	5/8	3/4	1/2	1/4-20	5/16	Z4443	Z4050	10	Z4447PA		
5/16"	3/4	7/8	3/4	1/4-20	5/16	Z4444	Z4095	10	Z4444PAł		
0,10	7/8		3/4	1/4-20	5/16	Z4444	Z4051	10	Z4449PA		
		1-1/8	1	1/4-20	5/16	Z4446	Z4095	10	Z4446PA		
	1-1/4	1-3/8	1-1/4	1/4-20	5/16	Z4448	Z4095	10	Z4448PA		
	1-1/2	1-5/8	1-1/2	1/4-20	5/16	Z4450	Z4095	10	Z4450PA		
3/8"	1/2	5/8	1/2	5/16-18	5/16	Z4146	Z4096	1	Z4146PA		



Accurate Manufactured Products Group



SPECIAL ORDERS AVAILABLE-

Small Quantities to Large Volume



Phone: 317-472-9000 • FAX: 317-472-9010 • email: sales@ampg.com • www.ampg.com



Combo Truss Head FEMALE BARRELS—Zinc-Plated Steel

Com	bo Hea	ad Fem	nale Ba	arrels	ZINC-	PLATED	STEEL
Barrel	Barrel	Thread	Thread		Head	Head	Order
Diameter	Length	Size	Depth	Drive	Diameter	Height	Number
	3/8"	6-32	15/64"	Combo	5/16"	5/64"	Z4105
	1/2	6-32	3/8	Combo	5/16	5/64	Z4106
3/16	5/8	6-32	3/8	Combo	5/16	5/64	Z4107
3/10	3/4	6-32	3/8	Combo	5/16	5/64	Z4108
	7/8	6-32	3/8	Combo	5/16	5/64	Z4109
	1"	6-32	3/8	Combo	5/16	5/64	Z4110
	1/4	8-32	Thru	Slot	3/8	3/32	Z4435
	3/8	8-32	15/64"	Combo	3/8	3/32	Z4437
13/64	1/2	8-32	3/8	Combo	3/8	3/32	Z4438
13/04	5/8	8-32	3/8	Combo	3/8	3/32	Z4439
	3/4	8-32	3/8	Combo	3/8	3/32	Z4440
	1	8-32	3/8	Combo	3/8	3/32	Z4442
	1/4	10-24	Thru	Slot	7/16	1/8	Z4404
	5/16	10-32	Thru	Slot	3/8	1/8	Z4840
	3/8	10-24	5/16	Combo	7/16	1/8	Z4406
	1/2	10-24	3/8	Combo	7/16	1/8	Z4408
1/4	5/8	10-24	3/8	Combo	7/16	1/8	Z4410
1/-	3/4	10-24	3/8	Combo	7/16	1/8	Z4412
	1	10-24	3/8	Combo	7/16	1/8	Z4416
	1-1/4	10-24	3/8	Combo	7/16	1/8	Z4420
	1-1/2	10-24	3/8	Combo	7/16	1/8	Z4424
	2	10-24	3/8	Combo	7/16	1/8	Z4432
L	0.00	4/4.00	0/40	0 1	0/10	= /0.0	
	3/8"	1/4-20	3/16	Combo	9/16	5/32	Z4445
	1/2	1/4-20	3/8	Combo	9/16	5/32	Z4443
5/16	3/4	1/4-20	3/8	Combo	9/16	5/32	Z4444
••	1	1/4-20	3/8	Combo	9/16	5/32	Z4446
	1-1/4	1/4-20	1/2	Combo	9/16	5/32	Z4448
	1-1/2	1/4-20	1/2	Combo	9/16	5/32	Z4450
	3/8	5/16-18	3/8	Combo	11/16	11/64	Z4145
	3/8 1/2	5/16-18	3/8	Combo	11/16	11/64	Z4145 Z4146
3/8	3/4	5/16-18	3/8 1/2	Combo	11/16	11/64	Z4146 Z4148
	3/4 1	5/16-18	1/2	Combo	11/16	11/64	Z4140 Z4150
		0/10-10	1/2	Odifioo	11/10	11/04	24130

Sex Bolts &

~



Combo Truss Head Machine Screws—Zinc-Plated Steel

Manufactured to match our Combo Head Sex Bolts for a finished appearance. Heads are the same dimensions as our Combo Head Sex Bolts series.

Combo Head Mating	ZINC-PL	ATED STEEL	
0	Head	Head	Order
Size	Diameter	Height	Number
6-32 X 5/16 Steel Zinc	5/16"	5/64"	Z4074
8-32 X 5/16 Steel Zinc	3/8	1/8	Z4075
10-24 X 5/16 Steel Zinc	7/16	1/8	Z4085
1/4-20 X 5/16 Steel Zinc	9/16	5/32	Z4095
5/16-18 X 5/16 Steel Zinc	11/16	11/64	Z4096



Combo Head Shoulder Mating Screws—Zinc-Plated Steel

	Combo Head Sho	ZINC	C-PLA	TED ST	TEEL			
	For Female	Shoulder	Shoulder	Thread	Thread	Overall		Order
	Barrel Diameters	Diameter	Length	Size	Length	Length	Drive	Number
	13/64 Diameter	13/64"	1/4"	8-32	5/16"	9/16"	Combo	Z4000
	1/4" Diameter	1/4	1/4	10-24	5/16	9/16	Combo	Z4025
	5/16" Diameter	5/16	1/8	1/4-20	5/16	7/16	Combo	Z4051
L	5/16" Diameter	5/16	1/4	1/4-20	5/16	9/16	Combo	Z4050







Combo Head Sex Bolts




Benefits:

- Truss Head, combination slotted/Phillips drive
- All components are matched. Heads on both male and female parts are identical.
- Shoulder Screws and Female Barrels allow different grip lengths to be achieved.
- Machine Screws present a finished set appearance.
- Heads manufactured in accordance with IFI Standards.







Combo Truss Head Barrel & Screw SETS—18-8 Stainless Steel

Barrel Diameter	Material	or Fhickness Range)	Female Barrel	Thread	Male Screw Thread	Replacement Female Barrel	Replacement Male Screw	Quantity of Each	SET ORDER NUMBER
	Minimum	Maximum	Length	Size	Length	Order Number	Order Number	Part	
3/16"	3/8"	1/2"	3/8"	6-32	5/16"	Z4105SS	Z4074SS	1	Z4105SSPA
13/64"	3/8	1/2	3/8	8-32	5/16	Z4125SS	Z4075SS	1	Z4125SSPA
13/04	3/4	7/8	3/4	8-32	5/16	Z4128SS	Z4075SS	1	Z4128SSPA
	1/4	3/8	1/4	10-24	5/16	Z4404SS	Z4085SS	1	Z4404SSPA
	3/8	1/2	3/8	10-24	5/16	Z4406SS	Z4085SS	1	Z4406SSPA
	1/2	5/8	1/2	10-24	5/16	Z4408SS	Z4085SS	1	Z4408SSPA
	5/8	3/4	5/8	10-24	5/16	Z4410SS	Z4085SS	1	Z4410SSPA
1/4"	3/4	7/8	3/4	10-24	5/16	Z4412SS	Z4085SS	1	Z4412SSPA
	1	1-1/8	1	10-24	5/16	Z4416SS	Z4085SS	1	Z4416SSPA
	1-1/4	1-3/8	1-1/4	10-24	5/16	Z4420SS	Z4085SS	1	Z4420SSPA
	1-1/2	1-5/8	1-1/2	10-24	5/16	Z4424SS	Z4085SS	1	Z4424SSPA
	2	2-1/8	2	10-24	5/16	Z4432SS	Z4085SS	1	Z4432SSPA
	3/8	1/2	3/8	1/4-20	5/16	Z4135SS	Z4095SS	1	Z4135SSPA
	1/2	5/8	1/2	1/4-20	5/16	Z4443SS	Z4095SS	1	Z4443SSPA
	5/8	3/4	5/8	1/4-20	5/16	Z4137SS	Z4095SS	1	Z4137SSPA
5/16"	3/4	7/8	3/4	1/4-20	5/16	Z4444SS	Z4095SS	1	Z4444SSPA
5/10	7/8	1	7/8	1/4-20	5/16	Z4139SS	Z4095SS	1	Z4139SSPA
	1	1-1/8	1	1/4-20	5/16	Z4446SS	Z4095SS	1	Z4446SSPA
	1-1/4	1-3/8	1-1/4	1/4-20	5/16	Z4448SS	Z4095SS	1	Z4448SSPA
	1-1/2	1-5/8	1-1/2	1/4-20	5/16	Z4449SS	Z4095SS	1	Z4449SSPA
3/8"	1/2	5/8	1/2	5/16-18	5/16	Z4146SS	Z4096SS	1	Z4146SSPA



Small Quantities to Large Volume





A20

Sex Bolts &


Combo Head Sex Bolts



Combo Truss Head FEMALE BARRELS


18-8 Stainless Steel





Comb	oo Hea	d Fem	ale Ba	rrels	18-8 S	TAINLE	SS STEEL
Barrel	Barrel	Thread	Thread		Head	Head	18-8 SS
Diameter	Length	Size	Depth	Drive	Diameter	Height	Order Number
	3/8"	6-32	19/64"	Combo	5/16"	5/64"	Z4105SS
	1/2	6-32	3/8	Combo	5/16	5/64	Z4106SS
3/16"	5/8	6-32	3/8	Combo	5/16	5/64	Z4107SS
3/10	3/4	6-32	3/8	Combo	5/16	5/64	Z4108SS
	7/8	6-32	3/8	Combo	5/16	5/64	Z4109SS
	1"	6-32	3/8	Combo	5/16	5/64	Z4110SS
	1/4	0.00	These	Slot	2/0	2/20	Z4124SS
	3/8	8-32 8-32	Thru 19/64	Combo	3/8 3/8	3/32 3/32	Z412455 Z4125SS
	3/8 1/2	8-3∠ 8-32	3/8		3/8	3/32 3/32	Z412555 Z4126SS
13/64"	5/8	8-32 8-32	3/8	Combo Combo	3/8	3/32 3/32	Z412655 Z4127SS
13/04	3/4	8-32	3/8	Combo	3/8	3/32	Z412735 Z4128SS
	3/4 7/8	8-32 8-32	3/8	Combo	3/8	3/32	Z412055 Z4129SS
	1	8-32 8-32	3/8	Combo	3/8	3/32	Z412955 Z4130SS
	1	0-32	5/6	COMDO	5/0	3/32	2413033
	1/4	10-24	Thru	Slot	7/16	1/8	Z4404SS
	3/8	10-24	5/16	Combo	7/16	1/8	Z440433
	1/2	10-24	3/8	Combo	7/16	1/8	Z4408SS
	5/8	10-24	3/8	Combo	7/16	1/8	Z4410SS
1/4"	3/4	10-24	3/8	Combo	7/16	1/8	Z4412SS
1/4	1	10-24	3/8	Combo	7/16	1/8	Z4416SS
	1-1/4	10-24	3/8	Combo	7/16	1/8	Z4420SS
	1-1/2	10-24	3/8	Combo	7/16	1/8	Z4424SS
	2	10-24	3/8	Combo	7/16	1/8	Z4432SS
			0.0	001120			
	3/8	1/4-20	19/64	Combo	9/16	5/32	Z4135SS
	1/2	1/4-20	3/8	Combo	9/16	5/32	Z4443SS
	5/8	1/4-20	3/8	Combo	9/16	5/32	Z4137SS
E/A C"	3/4	1/4-20	3/8	Combo	9/16	5/32	Z4444SS
5/16"	7/8	1/4-20	3/8	Combo	9/16	5/32	Z4139SS
	1	1/4-20	3/8	Combo	9/16	5/32	Z4446SS
	1-1/4	1/4-20	3/8	Combo	9/16	5/32	Z4448SS
	1-1/2	1/4-20	3/8	Combo	9/16	5/32	Z4449SS
	3/8	5/16-18	3/8	Combo	11/16	11/64	Z4145SS
	1/2	5/16-18	3/8	Combo	11/16	11/64	Z4146SS
3/8"	5/8	5/16-18	3/8	Combo	11/16	11/64	Z4147SS
0/0	3/4	5/16-18	1/2	Combo	11/16	11/64	Z4148SS
	7/8	5/16-18	1/2	Combo	11/16	11/64	Z4149SS
	1	5/16-18	1/2	Combo	11/16	11/64	Z4150SS

Combo Truss Head Machine Screws 18-8 Stainless Steel



THREAD SIZE

18-8 STAINLESS STEEL	Combo Truss Head Machine Screws					
18-8 St/St	Head	Head				
Order Number	Height	Diameter	Size			
Z4074SS	5/64"	5/16"	6-32 X 5/16			
Z4075SS	1/8	3/8	8-32 X 5/16			
Z4085SS	1/8	7/16	10-24 X 5/16			
Z4095SS	5/32	9/16	1/4-20 X 5/16			
Z4096SS	11/64	11/16	5/16-18 X 5/16			













Combo Head Sex Bolts



Benefits:

- Truss Head, combination slotted/Phillips drive
- All components are matched. Heads on both male and female parts are identical.
- Shoulder Screws and Female Barrels allow different grip lengths to be achieved.
- Machine Screws present a finished set appearance.
- Heads manufactured in accordance with IFI Standards.








Type 316 stainless steel offers more corrosion resistance than 18-8 stainless steel. Widely used in chemical processing as well as marine enviroments, as the molybdenum in 316 stainless steel has higher resistance to chlorides.

Combo Truss Head Barrel & Screw SETS—Type 316 Stainless Steel

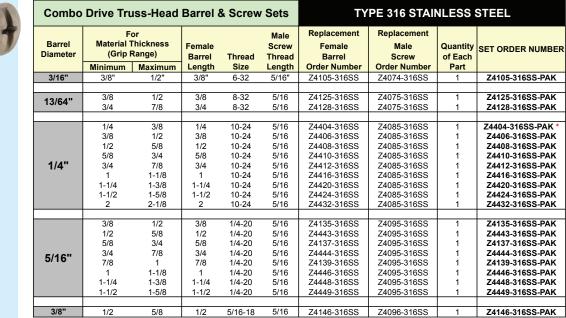

SPECIAL ORDERS AVAILABLE—

Small Quantities to Large Volume

A22





Sex Bolts &


Combo Head Sex Bolts

🕘 IMPORT

Combo Truss Head FEMALE BARRELS


Type 316 Stainless Steel





Comb	oo Hea	ld Fem	ale Ba	rrels	TYPE	316 STA	INLESS STEEL
Barrel	Barrel	Thread	Thread		Head	Head	18-8 SS
Diameter	Length	Size	Depth	Drive	Diameter	Height	Order Number
	3/8"	6-32	19/64"	Combo	5/16"	5/64"	Z4105-316SS
	1/2	6-32	3/8	Combo	5/16	5/64	Z4106-316SS
3/16"	5/8	6-32	3/8	Combo	5/16	5/64	Z4107-316SS
3/10	3/4	6-32	3/8	Combo	5/16	5/64	Z4108-316SS
	7/8	6-32	3/8	Combo	5/16	5/64	Z4109-316SS
	1"	6-32	3/8	Combo	5/16	5/64	Z4110-316SS
	1/4	8-32	Thru	Slot	3/8	3/32	Z4124-316SS
	3/8	8-32	19/64	Combo	3/8	3/32	Z4125-316SS
	1/2	8-32	3/8	Combo	3/8	3/32	Z4126-316SS
13/64"	5/8	8-32	3/8	Combo	3/8	3/32	Z4127-316SS
	3/4	8-32	3/8	Combo	3/8	3/32	Z4128-316SS
	7/8	8-32	3/8	Combo	3/8	3/32	Z4129-316SS
	1	8-32	3/8	Combo	3/8	3/32	Z4130-316SS
	1/4	10-24	Thru	Slot	7/16	1/8	Z4404-316SS
	3/8	10-24	5/16	Combo	7/16	1/8	Z4406-316SS
	1/2	10-24	3/8	Combo	7/16	1/8	Z4408-316SS
	5/8	10-24	3/8	Combo	7/16	1/8	Z4410-316SS
1/4"	3/4	10-24	3/8	Combo	7/16	1/8	Z4412-316SS
	1	10-24	3/8	Combo	7/16	1/8	Z4416-316SS
	1-1/4	10-24	3/8	Combo	7/16	1/8	Z4420-316SS
	1-1/2	10-24	3/8	Combo	7/16	1/8	Z4424-316SS
	2	10-24	3/8	Combo	7/16	1/8	Z4432-316SS
	3/8	1/4-20	19/64	Combo	9/16	5/32	Z4135-316SS
	1/2	1/4-20	3/8	Combo	9/16	5/32	Z4443-316SS
	5/8	1/4-20	3/8	Combo	9/16	5/32	Z4137-316SS
5/16"	3/4	1/4-20	3/8	Combo	9/16	5/32	Z4444-316SS
0/10	7/8	1/4-20	3/8	Combo	9/16	5/32	Z4139-316SS
	1	1/4-20	3/8	Combo	9/16	5/32	Z4446-316SS
	1-1/4	1/4-20	3/8	Combo	9/16	5/32	Z4448-316SS
	1-1/2	1/4-20	3/8	Combo	9/16	5/32	Z4449-316SS
	3/8	5/16-18	3/8	Combo	11/16	11/64	Z4145-316SS
	1/2	5/16-18	3/8	Combo	11/16	11/64	Z4146-316SS
3/8"	5/8	5/16-18	3/8	Combo	11/16	11/64	-
5/0	3/4	5/16-18	1/2	Combo	11/16	11/64	Z4148-316SS
	7/8	5/16-18	1/2	Combo	11/16	11/64	-
	1	5/16-18	1/2	Combo	11/16	11/64	Z4150-316SS

Combo Truss Head Machine Screws Type 316 Stainless Steel



THREAD SIZE

Combo Truss He	ead Machine	316 STAINLESS STEEL	
0:	Head	Head	Type 316 St/St
Size	Diameter	Height	Order Number
6-32 X 5/16	5/16"	5/64"	Z4074-316SS
8-32 X 5/16	3/8	1/8	Z4075-316SS
10-24 X 5/16	7/16	1/8	Z4085-316SS
1/4-20 X 5/16	9/16	5/32	Z4095-316SS
5/16-18 X 5/16	11/16	11/64	Z4096-316SS





Tapped-Thru Slotted Head

Ű






٢

Tamperproof Sex Bolts

6 Lobe with Pin Security Sex Bolts—The Complete System

A solution that replaces the traditional partition sex bolts, with superior drive characteristics, and a wider range of sizes. (See chart on facing page for available sizes and order numbers)

- Male screws available with or without shoulders.
- All parts are matched for a finished appearance.
- Both female and male bolts feature the 6-Lobe with Pin Security Drive.
- 6-Lobe drive has many advantages-
 - No cam out during installation No head distortion during driving,
 - No special tooling required for both installation and removal.
- Head dimensions for both male and female parts are matched,
 - per IFI standards.








Truss Head 6 Lobe with Pin Security Screws

18-8 Stainless Steel

- Male screws available with or without shoulders.
- •6-Lobe drive has many advantages-
 - No cam out during installation
 - No head distortion during driving,

No special tooling required for both installation and removal.



Truss Head 6 Lobe with Pin <u>SHOULDER</u> Security Screws 18-8 Stainless Steel









SPECIAL ORDERS AVAILABLE—

Small Quantities to Large Volume







A24

Sex Bolts & Mating Fasteners

٢

Tamperproof Sex Bolts

MADE & USA MADE

Female Truss Head Sex Bolts — 6 Lobe with Pin Security Drive

Female Sex Bolts and Male Tamperproof Truss Head Screws are sold separately

6 Lobe	Tamper	proof Se	curity-	-Female I	Barrels	18-	8 ST/ST
Barrel	Barrel	Thread	Thread	Head	Head	Drive	Order
Diameter	Length	Size	Depth	Diameter	Height	Size	Number
Diameter	3/8"	10-24	1/4"	7/16"	7/64"	T 20	Z4406T6S
	1/2	10-24	1/4	7/16	7/64	T 20	Z4408T6S
	5/8	10-24	1/4	7/16	7/64	T 20	Z4410T6S
1/4	3/4	10-24	3/8	7/16	7/64	T 20	Z4412T6S
	1	10-24	3/8	7/16	7/64	T 20	Z4416T6S
	1-1/4	10-24	3/8	7/16	7/64	T 20	Z4420T6S
	1-1/2	10-24	3/8	7/16	7/64	T 20	Z4424T6S
	1/2	1/4-20	1/4	9/16	9/64	T 27	Z4443T6S
	3/4	1/4-20	3/8	9/16	9/64	T 27	Z4444T6S
5/16	1	1/4-20	3/8	9/16	9/64	T 27	Z4446T6S
	1-1/4	1/4-20	3/8	9/16	9/64	T 27	Z4448T6S
	1-1/2	1/4-20	3/8	9/16	9/64	T 27	Z4449T6S

6 Lo Truss Head	be with Pin d Security \$		AINLESS EEL	
	Head	Head		Order
Size	Diameter	Height	Drive	Number
10-24 X 1/4"	7/16"	7/64"	T 20	Z4580SS
10-24 X 1/2	7/16	7/64	T 20	Z4582SS
10-24 X 1	7/16	7/64	T 20	Z4588SS
1/4-20 X 1/4	9/16	9/64	T 27	Z4591SS
1/4-20 X 3/8	9/16	9/64	T 27	Z4590SS
1/4-20 X 1/2	9/16	9/64	T 27	Z4592SS

	6 Lobe with Pin Truss Head Security Screws WITH SHOULDER								
	Shoulder	Total Length	Shoulder	Thread	Head	Head		Order	
Size	Diameter	Under Head	Length	Length	Diameter	Height	Drive	Number	
10-24 X 1/4"	1/4"	3/8"	1/8"	1/4"	7/16"	7/64"	T20	Z4581SS	
10-24 X 1/4	1/4	1/2	1/4	1/4	7/16	7/64	T20	Z4583SS	
10-24 X 3/8	1/4	5/8	1/4	3/8	7/16	7/64	T20	Z4584SS	
10-24 X 5/8	1/4	7/8	1/4	5/8	7/16	7/64	T20	Z4585SS	
10-24 X 7/8	1/4	1-1/8	1/4	7/8	7/16	7/64	T20	Z4586SS	
1/4-20 X 1/4	5/16	1/2	1/4	1/4	9/16	9/64	T27	Z4593SS	
1/4-20 X 3/8	5/16	1/2	1/8	3/8	9/16	9/64	T27	Z4597SS	
1/4-20 X 3/8	5/16	5/8	1/4	3/8	9/16	9/64	T27	Z4594SS	
1/4-20 X 5/8	5/16	7/8	1/4	5/8	9/16	9/64	T27	Z4595SS	
1/4-20 X 7/8	5/16	1-1/8	1/4	7/8	9/16	9/64	T27	Z4596SS	

Tamperproof Security Tools



6 Lobe with Pin Bit						
Size	Hex Size	Order Number				
T 20	1/4"	BITT20				
T 27	1/4"	BITT27				







d Phone: 317-472-9000 • FAX: 317-472-9010 • email: sales@ampg.com • www.ampg.com





See chart on facing page for available sizes and order numbers

Tamperproof Sex Bolts

ALL-NEW EXTRA LARGE Tamperproof Sex Bolts

A solution for playground equipment, exercise equipment, detention centers, hospitals, or any other public spaces that need security hardware.

- Male screws available with or without shoulders.
- All parts are matched for a finished appearance.
- Both female and male bolts feature the 6-Lobe with Pin Security Drive.
- 6-Lobe drive has many advantages— No cam out during installation No head distortion during driving, No special tooling required for both installation and removal.
- Head dimensions for both male and female parts are matched, per IFI standards.




ALL-NEW EXTRA LARGE Security Screws -18-8 Stainless Steel

Female Sex Bolts and Male Tamperproof Truss Head Screws are sold separately

HEAD HEAD HEIGHT

ALL-NEW EXTRA LARGE SHOULDER Security Screws —18-8 Stainless Steel







SPECIAL ORDERS AVAILABLE— Small Quantities to Large Volume



Tamperproof Security Tools for Extra Large Tamperproof Sex Bolts



6 Lob	e with Pi	n Bit	
	Hex	Order	
Size	Size	Number	
T40	1/4"	BITT40	
T45	1/4"	BITT45	



Sex Bolts & Mating Fasteners

0

Tamperproof Sex Bolts

⊘IMPORT & USA∕∭MADE

ALL-NEW EXTRA LARGE Truss Head Sex Bolts — 6 Lobe with Pin Security Drive

Female Sex Bolts and Male Tamperproof Truss Head Screws are sold separately

EXTRA	LARGE 6	Lobe Tar	nperproo	f—Female	e Barrels	18-	8 ST/ST
Barrel	Barrel	Thread	Thread	Head	Head	Drive	Order
Diameter	Length	Size	Depth	Diameter	Height	Size	Number
	1/2"	3/8-16	5/16"	7/8"	1/4"	T40	Z4900T6S
	3/4	3/8-16	7/16	7/8	1/4	T40	Z4901T6S
1/2	1	3/8-16	5/8	7/8	1/4	T40	Z4902T6S
	1-1/2	3/8-16	5/8	7/8	1/4	T40	Z4903T6S
	2	3/8-16	5/8	7/8	1/4	T40	Z4904T6S
	1/2	1/2-13	5/16	1"	5/16"	T40	Z4906T6S
	3/4	1/2-13	7/16	1	5/16	T40	Z4907T6S
5/8	1	1/2-13	5/8	1	5/16	T40	Z4908T6S
	1-1/2	1/2-13	5/8	1	5/16	T40	Z4909T6S
	2	1/2-13	5/8	1	5/16	T40	Z4910T6S
	1/2	5/8-11	5/16	1-1/8"	3/8"	T45	Z4912T6S
	3/4	5/8-11	7/16	1-1/8	3/8	T45	Z4913T6S
3/4	1	5/8-11	3/4	1-1/8	3/8	T45	Z4914T6S
	1-1/2	5/8-11	3/4	1-1/8	3/8	T45	Z4915T6S
	2	5/8-11	3/4	1-1/8	3/8	T45	Z4916T6S
	1/2	3/4-10	5/16	1-1/4"	1/2"	T45	Z4918T6S
	3/4	3/4-10	7/16	1-1/4	1/2	T45	Z4919T6S
7/8	1	3/4-10	3/4	1-1/4	1/2	T45	Z4920T6S
	1-1/2	3/4-10	3/4	1-1/4	1/2	T45	Z4921T6S
	2	3/4-10	3/4	1-1/4	1/2	T45	Z4922T6S

EXTRA LAR Truss Head		TAINLESS TEEL		
	Head	Head		Order
Size	Diameter	Height	Drive	Number
3/8-16 x 3/4"	7/8"	1/4"	T40	Z4925SS
3/8-16 x 1-1/2	7/8	1/4	T40	Z4926SS
1/2-13 x 3/4 1/2-13 x 1-1/2	1 1	5/16 5/16	T40 T40	Z4928SS Z4929SS
5/8-11 x 3/4 5/8-11 x 1-1/2	1-1/8 1-1/8	3/8 3/8	T45 T45	Z4931SS Z4932SS
3/4-10 x 3/4 3/4-10 x 1-1/2	1-1/4 1-1/4	1/2 1/2	T45 T45	Z4934SS Z4935SS

т	EXTRA LARGE 6 Lobe with Pin Truss Head Security Screws WITH SHOULDER											
	Shoulder	Total Length	Shoulder	Thread	Head	Head	-	Order				
Size	Diameter	Under Head	Length	Length	Diameter	Height	Drive	Number				
3/8-16 x 3/4"	1/2"	1"	1/4"	3/4"	7/8"	1/4"	T40	Z4938SS				
3/8-16 x 1-1/2	1/2	1-3/4	1/4	1-1/2	7/8	1/4	T40	Z4940SS				
1/2-13 x 3/4 1/2-13 x 1-1/2	5/8 5/8	1 1-3/4	1/4 1/4	3/4 1-1/2	1 1	5/16 5/16	T40 T40	Z4945SS Z4947SS				
5/8-11 x 3/4	3/4	1	1/4	3/4	1-1/8	3/8	T45	Z4950SS				
5/8-11 x 1-1/2	3/4	1-3/4	1/4	1-1/2	1-1/8	3/8	T45	Z4952SS				
3/4-10 x 3/4	7/8	1	1/4	3/4	1-1/4	1/2	T45	Z4955SS				
3/4-10 x 1-1/2	7/8	1-3/4	1/4	1-1/2	1-1/4	1/2	T45	Z4957SS				













Tamperproof One-Way Sex Bolts

One Way Head Bathroom Partition Sex Bolts—The Complete System

10-24NF-2B TO "B" THREAD DEPTH

SERRATIONS

Standard items for joining bathroom partitions and other secure installations. One Way Tamperproof Heads — 18-8 Stainless Steel, with 10-24 threads.

NE WAY SLOT IN TRUSS HEAD RUSS HEAD PER IFI STANDARDS

Partition Information:

For 1/2" thick partitions, order (1) Z4378 Male and (1) Z4379 Female For 1" thick partitions, order (1) Z4384 Male and (1) Z4381 Female For 1-1/4" thick partitions, order (1) Z4384 Male and (1) Z4382 Female

Female Barrel

Stainless Steel—Truss Head with One Way Slot 1/4" barrel diameter • 10-24 threads 7/16" head diameter • Serrations under head





See chart on facing


page for available sizes and order numbers

Male Shoulder Screw

Male and Female Set Stainless Steel—Truss Head with

One Way Slot


Stainless Steel—Truss Head with One Way Slot 1/4" shoulder diameter • 10-24 threads 7/16" head diameter • Serrations under head





SPECIAL ORDERS AVAILABLE— Small Quantities to Large Volume



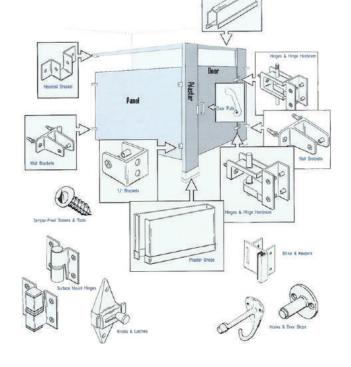



Sex Bolts & Mating Fasteners

65

Tamperproof One-Way Sex Bolts



	ne Way Head I ss Head Fema	18-8 STAINLESS STEEL		
Barrel			Head	Order
Length	Length Diameter Size		Diameter	Number
1/4"	1/4"	10-24	7/16	Z4376
3/8	1/4	10-24	7/16	Z4379
1/2	1/4	10-24	7/16	Z4380
5/8	1/4	10-24	7/16	Z4377
3/4	1/4	10-24	7/16	Z4381
1	1/4	10-24	7/16	Z4382
One Wa	y Head—No Ser	STEEL ZINC		
1	5/16	31/64	Z4392	



	ne Way Head P Iale Shoulder	18-8 STAINL	18-8 STAINLESS STEEL		
Shoulder	Total Length	Total Length Thread		Order	
Length	Under Head	Length	Size	Number	
1/8	3/8	1/4	10-24	Z4378	
1/8	1/2	3/8	10-24	Z4383	
1/4	15/32	7/32	10-24	Z4375	
1/4	19/32	11/32	10-24	Z4388	
1/4	3/4	1/2	10-24	Z4384	
1/4	15/16	11/16	10-24	Z4385	
1/4	1-3/16	15/16	10-24	Z4386	
1/4	1-5/16	1-1/16	10-24	Z4387	

O	ne Way Head F	Partition Sex B	18-8 STAINLESS STEEL			
	Female		Male	Male		
Grip	Barrel	Female Barrel	Screw	Screw Shoulder	Quantity of	Set
Range	Order Number	Length	Order Number	Length	Each Part	Order Number
1/2"	Z4379	3/8"	Z4378	1/8"	10	Z4379PAK
3/4	Z4380	1/2	Z4384	1/4	10	Z4380PAK
1	Z4381	3/4	Z4384	1/4	10	Z4381PAK
1-1/4	Z4382	1	Z4384	1/4	10	Z4382PAK



Ó


Button Head Socket Drive Barrel Bolts USA MADE

Button Head Socket Drive Barrel Bolts — Female 18-8 Stainless Steel

A line of contemporary barrel bolts that have a button head with a hex drive. The smooth domed appearance of the head lends a sleek finished look to all products and installations.

Our standard size range is from 1/4" diameter x 3/8" length up to 7/8" diameter x 3" length. Manufactured in the USA from durable and corrosion-resistant Type 303 Stainless Steel, these parts are fully machined for a more precise part.


Used in industrial, construction, marine, and transportation, they rpovide excellent strength and versatility. Used in furniture and commercial applications, they present a beautiful modern look and finished appearance.



Specials in any size are available with a quick turn-around from our factory.









See chart on facing page for available sizes and order numbers





SPECIAL ORDERS AVAILABLE— Small Quantities to Large Volume






Button Head Socket Drive

USA MADE

Butto	n Head	Socket D	rive—F	emale Ba	rrels	18-8 Stai	nless Steel
Barrel	Barrel	Thread	Thread	Head	Head	Hex Key	Order
Diameter	Length	Size	Depth	Diameter	Height	Size	Number
	3/8"	10-24	3/16"	7/16"	1/8"	5/32"	Z1600
	1/2	10-24	5/16	7/16	1/8	5/32	Z1602
1/4	3/4	10-24	3/8	7/16	1/8	5/32	Z1604
	1	10-24	3/8	7/16	1/8	5/32	Z1606
	1-1/4	10-24	3/8	7/16	1/8	5/32	Z1608
	1/2	1/4-20	3/8	21/32	3/16	7/32	Z1616
3/8	3/4	1/4-20	3/8	21/32	3/16	7/32	Z1618
	1	1/4-20	3/8	21/32	3/16	7/32	Z1620
	1/2	3/8-16	3/8	7/8	1/4	5/16	Z1630
	5/8	3/8-16	3/8	7/8	1/4	5/16	Z1631
	3/4	3/8-16	3/8	7/8	1/4	5/16	Z1632
	7/8	3/8-16	3/8	7/8	1/4	5/16	Z1633
1/2	1	3/8-16	3/8	7/8	1/4	5/16	Z1634
1/2	1-1/2	3/8-16	3/8	7/8	1/4	5/16	Z1710
	1-3/4	3/8-16	3/8	7/8	1/4	5/16	Z1712
	2	3/8-16	3/8	7/8	1/4	5/16	Z1714
	2-1/2	3/8-16	3/8	7/8	1/4	5/16	Z1716
	3	3/8-16	3/8	7/8	1/4	5/16	Z1718
	1/2	1/2-13	5/16	1"	5/16	3/8	Z1720
	3/4	1/2-13	7/16	1"	5/16	3/8	Z1722
	1	1/2-13	5/8	1"	5/16	3/8	Z1724
5/8	1-1/2	1/2-13	5/8	1"	5/16	3/8	Z1726
5/0	1-3/4	1/2-13	5/8	1"	5/16	3/8	Z1728
	2	1/2-13	5/8	1"	5/16	3/8	Z1800
	2-1/2	1/2-13	5/8	1"	5/16	3/8	Z1802
	3	1/2-13	5/8	1"	5/16	3/8	Z1804
	1/2	5/8-11	5/16	1-1/8	3/8	3/8	Z1806
	3/4	5/8-11	7/16	1-1/8	3/8	3/8	Z1808
	1	5/8-11	3/4	1-1/8	3/8	3/8	Z1810
3/4	1-1/2	5/8-11	3/4	1-1/8	3/8	3/8	Z1812
3/4	1-3/4	5/8-11	3/4	1-1/8	3/8	3/8	Z1814
	2	5/8-11	3/4	1-1/8	3/8	3/8	Z1816
	2-1/2	5/8-11	3/4	1-1/8	3/8	3/8	Z1818
	3	5/8-11	3/4	1-1/8	3/8	3/8	Z1820
	1/2	5/8-11	5/16	1-1/4	1/2	1/2	Z1822
	3/4	5/8-11	7/16	1-1/4	1/2	1/2	Z1824
	1	5/8-11	3/4	1-1/4	1/2	1/2	Z1826
7/0	1-1/2	5/8-11	3/4	1-1/4	1/2	1/2	Z1828
7/8	1-3/4	5/8-11	3/4	1-1/4	1/2	1/2	Z1830
	2	5/8-11	3/4	1-1/4	1/2	1/2	Z1832
	2-1/2	5/8-11	3/4	1-1/4	1/2	1/2	Z1834
	3	5/8-11	3/4	1-1/4	1/2	1/2	Z1836
			-				
Butt	on Head	Socket Dr	ive—Mal	le Mating S	crews	18-8 St	ainless Steel
Shoulder	Length	Shoulder	Thread	Thread He	ad He	ad Hex Key	/ Order

Bu	tton Head	Socket D	s	18-8 Stai	nless Steel			
Shoulder	Length	Shoulder	Thread	Thread	Head	Head	Hex Key	Order
Diameter	Under Head	Length	Size	Length	Diameter	Height	Size	Number
	1/4"	NONE	10-24	1/4"	7/16"	1/8"	5/32"	Z1838
1/4	1/2	1/4	10-24	1/4	7/16	1/8	5/32	Z1768
	1	1/2	10-24	1/2	7/16	1/8	5/32	Z1769
	2/0	NONE	1/4-20	2/0	04/00	3/16	7/32	Z1840
	3/8			3/8	21/32		-	
3/8	3/4	1/4	1/4-20	1/2	21/32	3/16	7/32	Z1624
-	1	1/2	1/4-20	1/2	21/32	3/16	7/32	Z1770
-	1/2"	NONE	3/8-16	1/2"	7/8	1/4	5/16	Z1842
	1	1/2	3/8-16	1/2	7/8	1/4	5/16	Z1772
1/2	1-1/2	1	3/8-16	1/2	7/8	1/4	5/16	Z1774
	2	1-1/2	3/8-16	1/2	7/8	1/4	5/16	Z1776
	4./0!!	NONE	4/0.40	4/01	1"	E MAC	2/0	74044
	1/2"	NONE	1/2-13	1/2"	1"	5/16	3/8	Z1844
5/8		1/2	1/2-13	1/2	1"	5/16	3/8	Z1778
	1-1/2	1	1/2-13	1/2	•	5/16	3/8	Z1780
	2	1-1/2	1/2-13	1/2	1"	5/16	3/8	Z1782
	1/2"	NONE	5/8-11	1/2"	1-1/8	3/8	3/8	Z1846
	1	1/2	5/8-11	1/2	1-1/8	3/8	3/8	Z1784
3/4	1-1/2	1	5/8-11	1/2	1-1/8	3/8	3/8	Z1786
	2	1-1/2	5/8-11	1/2	1-1/8	3/8	3/8	Z1788
	4./01	NONE	E/0 44	1/2"	1-1/4	2/0	2/0	740.40
	1/2"	NONE	5/8-11	=		3/8	3/8	Z1848
7/8		1/2	5/8-11	1/2	1-1/4	3/8	3/8	Z1790
_	1-1/2	1	5/8-11	1/2	1-1/4	3/8	3/8	Z1792
	2	1-1/2	5/8-11	1/2	1-1/4	3/8	3/8	Z1794

USA MADE







0







Phone: 317-472-9000 • FAX: 317-472-9010 • *email: sales@ampg.com* • www.ampg.com

0






82° Flat Head Socket Drive Barrel Bolts USASMADE

82 Degree Flat Head Socket Drive Barrel Bolts — Female 18-8 Stainless Steel

Our 82° Flat Head Barrel Bolts are designed for use with countersunk holes, which allow the fasteners to sit flush with the surface, providing a clean and finished appearance. Made in the USA from Type 303 Stainless Steel which offers and excellent combination of strength and corrosion resistance.

Our standard size range is from 1/4" diameter x 3/8" length up to 7/8" diameter x 3" length. Specials are available in any size, call or email for a quote.

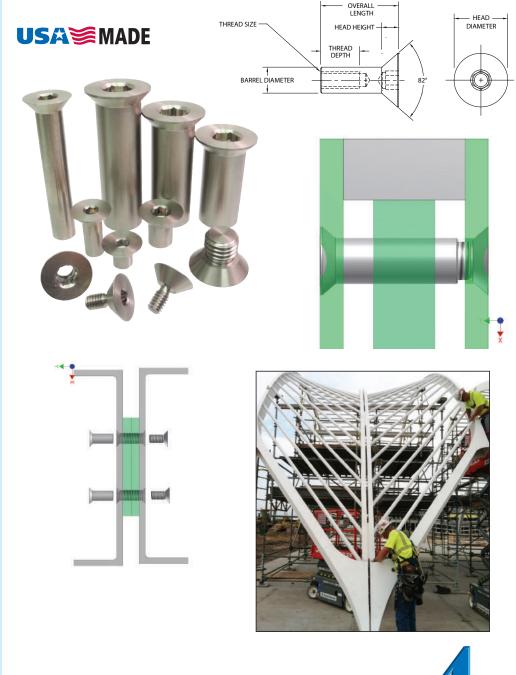

SPECIAL ORDERS AVAILABLE— Small Quantities

to Large Volume





82° Flat Head Socket Drive

Nov VAILABLE

82°	Flat Head	I Socket D	Drive—Fe	emale Bar	rels	18-8 Stair	less Steel
Barrel	Overall	Thread	Thread	Head	Head	Hex Key	Order
Diameter	Length	Size	Depth	Diameter	Height	Size	Number
Diamotor	3/8"	10-24	3/16*	33/64"	11/64"	5/32"	Z1640
	1/2	10-24	5/16*	33/64	11/64	5/32	Z1642
1/4	3/4	10-24	3/8	33/64	11/64	5/32	Z1644
		10-24	3/8	33/64	11/64	5/32	Z1646
	1-1/4	10-24	3/8	33/64	11/64	5/32	Z1648
	1/2	1/4-20	3/16*	3/4	15/64	7/32	Z1650
3/8	3/4	1/4-20	3/8	3/4	15/64	7/32	Z1652
	1	1/4-20	3/8	3/4	15/64	7/32	Z1654
	1/2	3/8-16	3/16*	7/8	1/4	5/16	Z1660
	3/4	3/8-16	3/8	7/8	1/4	5/16	Z1662
	1	3/8-16	1/2	7/8	1/4	5/16	Z1664
1/2	1-1/2	3/8-16	1/2	7/8	1/4	5/16	Z1665
	1-3/4 2	3/8-16 3/8-16	1/2 1/2	7/8 7/8	1/4 1/4	5/16 5/16	Z1667 Z1669
	2-1/2	3/8-10	1/2	7/8	1/4	5/16	Z1670
	3	3/8-16	1/2	7/8	1/4	5/16	Z1671
	1/2	1/2-13	1/4*	1"	1/4	3/8	Z1672
	3/4	1/2-13	3/8	1"	1/4	3/8	Z1672
	1	1/2-13	5/8	1"	1/4	3/8	Z1676
5 /0	1-1/2	1/2-13	3/4	1"	1/4	3/8	Z1678
5/8	1-3/4	1/2-13	3/4	1"	1/4	3/8	Z1680
	2	1/2-13	3/4	1"	1/4	3/8	Z1682
	2-1/2	1/2-13	3/4	1"	1/4	3/8	Z1683
	3	1/2-13	3/4	1"	1/4	3/8	Z1684
	1/2	5/8-11	1/4*	1-1/8	1/4	3/8	Z1686
	3/4	5/8-11	3/8	1-1/8	1/4	3/8	Z1688
		5/8-11	5/8	1-1/8	1/4	3/8	Z1690
3/4	1-1/2	5/8-11	3/4	1-1/8	1/4	3/8	Z1692 Z1694
	1-3/4 2	5/8-11 5/8-11	3/4 3/4	1-1/8 1-1/8	1/4 1/4	3/8 3/8	Z1694 Z1696
	2-1/2	5/8-11	3/4	1-1/8	1/4	3/8	Z1698
	3	5/8-11	3/4	1-1/8	1/4	3/8	Z1699
	1/2	5/8-11	1/4*	1-1/4	1/4	1/2	Z1700
	3/4	5/8-11	3/8	1-1/4	1/4	1/2	Z1700
	1	5/8-11	5/8	1-1/4	1/4	1/2	Z1702
7/0	1-1/2	5/8-11	3/4	1-1/4	1/4	1/2	Z1703
7/8	1-3/4	5/8-11	3/4	1-1/4	1/4	1/2	Z1704
	2	5/8-11	3/4	1-1/4	1/4	1/2	Z1705
	2-1/2	5/8-11	3/4	1-1/4	1/4	1/2	Z1706
	3	5/8-11	3/4	1-1/4	1/4	1/2	Z1707



0





* Open Head

Flat Hea	d Socket	Drive—N	Aale Mating	g Screws	18-8 Stai	nless Steel
Thread	Overall	Thread	Head	Head	Hex Key	Order
Size	Length	Length	Diameter	Height	Size	Number
	3/8"	5/32"	33/64"	11/64"	5/32"	Z1730
10-24	5/8	25/64	33/64	11/64	5/32	Z1732
	1	49/64	33/64	11/64	5/32	Z1734
1/4-20	3/4	7/16	3/4	15/64	7/32	Z1736
	3/4	3/8	7/8	1/4	5/16	Z1738
3/8-16	1-1/4	7/8	7/8	1/4	5/16	Z1740
	1-3/4	1	7/8	1/4	5/16	Z1742
	3/4	3/8	1"	1/4	3/8	Z1744
1/2-13	1-1/4	7/8	1"	1/4	3/8	Z1746
	1-3/4	1	1"	1/4	3/8	Z1748
	3/4	3/8	1-1/8	1/4	3/8	Z1750
	1-1/4	7/8	1-1/8	1/4	3/8	Z1752
E/0.44	1-3/4	1	1-1/8	1/4	3/8	Z1754
5/8-11	3/4	3/8	1-1/4	1/4	1/2	Z1756
	1-1/4	7/8	1-1/4	1/4	1/2	Z1758
	1-3/4	1	1-1/4	1/4	1/2	Z1760
					USA	MAD



Phone: 317-472-9000 • FAX: 317-472-9010 • email: sales@ampg.com • www.ampg.com

A33

0

USA SMADE




Low Profile Head Socket Drive Bolts


Low Profile Head Socket Drive Bolts


Type 316 Stainless Steel


This line of matched head mating fasteners was developed for an Architect who required specific holding parameters in a low profile head that would blend into the project design. The heads of these low-profile barrel bolts are ideal in applications where material to be fastened is too thin to countersink; not allowing the use of countersunk screws. The large diameter heads of the low-profile barrel bolts were engineered to spread the load across a wide surface to provide greater holding power in thinner material applications. When looking for a mating fastener that can be more concealed than button and flat head style fasteners, low-profile head socket drive barrel bolts offer a sleek, unobtrusive and polished finish for any design.















SPECIAL ORDERS AVAILABLE—

Small Quantities to Large Volume











34 Phone: 317-472-9000 • FAX: 317-472-9010 • *email: sales@ampg.com* • www.ampg.com

Sex Bolts &

Low Profile Head Socket Drive Bolts

Low-Pi	rofile He	Barrels	Type 316 SS				
Barrel	Barrel	Thread	Thread	Head	Head	Hex Key	Order
Diameter	Length	Size	Depth	Diameter	Height	Size	Number
	3/8"	10-24	3/16"	9/16"	3/32"	5/32"	Z1508
	1/2	10-24	5/16	9/16	3/32	5/32	Z1510
1/4"	3/4	10-24	3/8	9/16	3/32	5/32	Z1512
	1	10-24	3/8	9/16	3/32	5/32	Z1514
	1-1/4	10-24	3/8	9/16	3/32	5/32	Z1516
	1/2*	1/4-20	3/8*	25/32	3/32	7/32	Z1518
3/8"	3/4	1/4-20	3/8 3/8	25/32	3/32	7/32	Z1516 Z1520
5/0	1	1/4-20	3/8	25/32	3/32	7/32	Z1520
		174 20	0/0	20/02	0/02	1102	21022
	1/2*	3/8-16	3/8*	1	3/32	1/4	Z1524
	3/4	3/8-16	3/8	1	3/32	1/4	Z1526
	1	3/8-16	3/8	1	3/32	1/4	Z1528
1/2"	1-1/2	3/8-16	3/8	1	3/32	1/4	Z1530
1/2	1-3/4	3/8-16	3/8	1	3/32	1/4	Z1532
	2	3/8-16	3/8	1	3/32	1/4	Z1534
	2-1/2	3/8-16	3/8	1	3/32	1/4	Z1536
	3	3/8-16	3/8	1	3/32	1/4	Z1538
	0/4	1/0.10	7/10	1.1/0	1/0	0.10	
	3/4	1/2-13	7/16	1-1/8	1/8	3/8	Z1542
	1 1-1/2	1/2-13 1/2-13	5/8 5/8	1-1/8 1-1/8	1/8 1/8	3/8 3/8	Z1544 Z1546
5/8"	1-1/2	1/2-13	5/8	1-1/8	1/8	3/8 3/8	Z1546 Z1548
5/0	2	1/2-13	5/8	1-1/8	1/8	3/8	Z1540 Z1550
	2-1/2	1/2-13	5/8	1-1/8	1/8	3/8	Z1550 Z1552
	3	1/2-13	5/8	1-1/8	1/8	3/8	Z1552
			0.0			0,0	
	3/4	5/8-11	7/16	1-3/8	1/8	3/8	Z1558
	1	5/8-11	3/4	1-3/8	1/8	3/8	Z1560
	1-1/2	5/8-11	3/4	1-3/8	1/8	3/8	Z1562
3/4"	1-3/4	5/8-11	3/4	1-3/8	1/8	3/8	Z1564
	2	5/8-11	3/4	1-3/8	1/8	3/8	Z1566
	2-1/2	5/8-11	3/4	1-3/8	1/8	3/8	Z1568
	3	5/8-11	3/4	1-3/8	1/8	3/8	Z1570
	3/4	5/8-11	7/16	1-1/2	1/8	1/2	Z1574
	3/4 1	5/8-11 5/8-11	3/4	1-1/2	1/8	1/2	Z1574 Z1576
	1-1/2	5/8-11	3/4	1-1/2	1/8	1/2	Z1578 Z1578
7/8"	1-1/2	5/8-11	3/4	1-1/2	1/8	1/2	Z1578
110	2	5/8-11	3/4	1-1/2	1/8	1/2	Z1580
	2-1/2	5/8-11	3/4	1-1/2	1/8	1/2	Z1584
	3	5/8-11	3/4	1-1/2	1/8	1/2	Z1586

Low	-Profile Hea	ad Socket	Drive—	Male Ma	Type 316 SS			
Shoulder	Length	Shoulder	Thread	Thread	Head	Head	Hex Key	Order
Diameter	Under Head	Length	Size	Length	Diameter	Height	Size	Number
	1/4"	NONE	10-24	1/4"	9/16"	3/32"	5/32"	Z1900
1/4"	1/2	1/4	10-24	1/4	9/16	3/32	5/32	Z1902
	1	1/2	10-24	1/2	9/16	3/32	5/32	Z1904
	3/8	NONE	1/4-20	3/8	25/32	3/32	7/32	Z1906
3/8"	3/4	1/4	1/4-20	1/2	25/32	3/32	7/32	Z1908
	1	1/2	1/4-20	1/2	25/32	3/32	7/32	Z1910
	1/2	NONE	3/8-16	1/2	1	3/32	1/4	Z1912
	1/2	1/2	3/8-16	1/2	1	3/32	1/4	Z1912
1/2"	1-1/2	1	3/8-16	1/2	1	3/32	1/4	Z1916
	2	1-1/2	3/8-16	1/2	1	3/32	1/4	Z1918
	1/2	NONE	1/2-13	1/2	1-1/8	1/8	1/4	Z1920
	1/2	1/2	1/2-13	1/2	1-1/8	1/8	3/8	Z1920 Z1922
5/8"	1-1/2	1	1/2-13	1/2	1-1/8	1/8	3/8	Z1924
	2	1-1/2	1/2-13	1/2	1-1/8	1/8	3/8	Z1926
	4/0	NONE	5/0.44	4.10	4.0/0	1/0	0/0	74000
	1/2	NONE	5/8-11 5/8-11	1/2 1/2	1-3/8	1/8	3/8	Z1928
3/4"	1 1-1/2	1/2 1	5/8-11	1/2	1-3/8 1-3/8	1/8 1/8	3/8 3/8	Z1930 Z1932
	2	1-1/2	5/8-11	1/2	1-3/8	1/8	3/8	Z1932 Z1934
						-		
	1/2	NONE	5/8-11	1/2	1-1/2	1/8	3/8	Z1936
7/8/	1	1/2	5/8-11	1/2	1-1/2	1/8	3/8	Z1938
	1-1/2 2	1 1-1/2	5/8-11 5/8-11	1/2 1/2	1-1/2 1-1/2	1/8 1/8	3/8 3/8	Z1940 Z1942
		1 1/2	0/0-11	1/2	11/2	.,0	0/0	21342



0

USAMADE











d Phone: 317-472-9000 • FAX: 317-472-9010 • *email: sales@ampg.com* • www.ampg.com





TRUSS HEAD

RIVET HEAD


P

B


Aluminum Binding Posts & Screws

Accurate has the largest selection of Binding Posts available with either a Rivet Head or a Truss Head. They are also available in several materials—Aluminum, Stainless Steel, and Solid Brass. Aluminum available Black Anodized on special order.

In addition to the standard printing industry binding applications, binding posts provide a clean, flush, and secure fastener for many other applications, such as helmets, as shown below. TRUSS HEAD







Female Barrels—Plain Aluminum

Truss Head Aluminum Binding Posts—Female—Tapped Thru Head											
1/8"	13/64	13/32	.050070	8-32	Unlimited	Z4302X					
3/16"	13/64	13/32	.050070	8-32	Unlimited	Z4303					
1/4"	13/64	13/32	.050070	8-32	Unlimited	Z4304					
3/8"	13/64	13/32	.050070	8-32	Unlimited	Z4306X					
1/2"	13/64	13/32	.050070	8-32	Unlimited	Z4308T					

A	luminum I	Binding P	osts—Ferr	nale Barre	els	Rivet Head Closed Top	Truss Head Closed Top
Barrel	Barrel	Head	Head		Thread	Order	Order
Length	Diameter	Diameter	Height	Threads	Depth	Number	Number
1/4"	13/64	13/32	.040070	8-32	3/16	Z4304C	
3/8"	13/64	13/32	.040070	8-32	1/4	Z4306C	Z4306T
1/2"	13/64	13/32	.040070	8-32	3/8	Z4308	Z4308X
5/8"	13/64	13/32	.040070	8-32	3/8	Z4310	Z4310X
3/4"	13/64	13/32	.040070	8-32	3/8	Z4312	Z4312X
7/8"	13/64	13/32	.040070	8-32	3/8		Z4314X
1"	13/64	13/32	.040070	8-32	3/8	Z4316	Z4316X
1-1/4"	13/64	13/32	.040070	8-32	3/8	Z4320	Z4320X
1-1/2"	13/64	13/32	.040070	8-32	3/8	Z4324	Z4324X
1-3/4"	13/64	13/32	.040070	8-32	3/8	Z4328	Z4328X
2"	13/64	13/32	.040070	8-32	3/8	Z4332	Z4332X
2-1/4"	13/64	13/32	.040070	8-32	3/8	Z4336	Z4336X
2-1/2"	13/64	13/32	.040070	8-32	3/8	Z4344	Z4344X
2-3/4"	13/64	13/32	.040070	8-32	3/8	Z4346	Z4346X
3"	13/64	13/32	.040070	8-32	3/8	Z4348	Z4348X
3-1/4"	13/64	13/32	.040070	8-32	3/8		Z4350
3-1/2"	13/64	13/32	.040070	8-32	3/8		Z4358X
4"	13/64	13/32	.040070	8-32	3/8		Z4364X
4-1/2"	13/64	13/32	.040070	8-32	3/8		Z4366X
5"	13/64	13/32	.040070	8-32	3/8		Z4368X
6"	13/64	13/32	.040070	8-32	3/8		Z4396X

Accurate Manufactured Products Group





SPECIAL ORDERS AVAILABLE-Small Quantities to Large Volume



A36




IMPORT

Sex Bolts &



Binding Post Screws— Plain Aluminum



	Alu	uminum Binc	ling Post Scre	ews
	Screw	Head	Head	Order
	Size	Diameter	Height	Number
	8-32 X 3/16	13/32	.050070	Z4302
	8-32 X 1/4	13/32	.050070	Z4301
HREAD	8-32 X 5/16	13/32	.050070	Z4300516
	8-32 X 3/8	13/32	.050070	Z4300

Binding Post Sets— Plain Aluminum

	Plain Aluminum Binding Post Sets								
	Female		Male	Male					
Grip	Barrel	Female Barrel	Screw	Screw	Quantity of	Set			
Range	Order Number	Length	Order Number	Length	Each Part	Order Number			
1/8"	Z4302X	1/8"	Z4302	3/16"	50	Z4302XPAK			
3/16	3/16 Z4303 3/16		Z4302	3/16	50	Z4303PAK			
1/4	Z4304C	1/4	Z4302	3/16	50	Z4304CPAK			
3/8	Z4306C	3/8	Z4301	1/4	50	Z4306CPAK			
1/2	Z4308	1/2	Z4301	1/4	50	Z4308PAK			
5/8	Z4310	5/8	Z4301	1/4	50	Z4310PAK			
3/4	Z4312	3/4	Z4301	1/4	50	Z4312PAK			
7/8	Z4314X	7/8	Z4301	1/4	50	Z4314XPAK			
1	Z4316	1	Z4301	1/4	50	Z4316PAK			
1-1/4	Z4320	1-1/4	Z4301	1/4	50	Z4320PAK			
1-1/2	Z4324	1-1/2	Z4301	1/4	50	Z4324PAK			
1-3/4	Z4328	1-3/4	Z4301	1/4	25	Z4328PAK			
2	Z4332	2	Z4301	1/4	50	Z4332PAK			
2-1/4	Z4336	2-1/4	Z4301	1/4	50	Z4336PAK			
2-1/2	Z4344	2-1/2	Z4301	1/4	50	Z4344PAK			
2-3/4	Z4346	2-3/4	Z4301	1/4	50	Z4346PAK			
3	Z4348	3	Z4301	1/4	50	Z4348PAK			
3-1/2	Z4358X	3-1/2	Z4301	1/4	50	Z4358XPAK			
4	Z4364X	4	Z4301	1/4	50	Z4364XPAK			
4-1/2	Z4366X	4-1/2	Z4301	1/4	50	Z4366XPAK			
5	Z4368X	5	Z4301	1/4	50	Z4368XPAK			
6	Z4396X	6	Z4301	1/4	50	Z4396XPAK			





Female Barrel has no slot — Male Screw has Slotted Truss Head Plain Aluminum — Male and Female Barrel Packaged Together

Binding Post Extensions— Plain Aluminum

							_	
Binding Post Extensions—Aluminum								
Barrel Barrel Thread Internal External Order								
Diameter	Length	Size	Tap Depth	Stud Lth	Plating	Number		
13/64	1/4	8-32	3/16	1/8	None	Z4370		
13/64	1/2	8-32	3/8	1/4	None	Z4371		
13/64	3/4	8-32	3/8	1/4	None	Z4372		
13/64	3/4	8-32	3/8	1/4	Black	Z4372-BK		
13/64	1	8-32	3/8	1/4	None	Z4373		



imensions match the standard Aluminum Binding Posts hreads: 8-32 Male, 8-32 Female










Aluminum Binding Post—Female Barrel with Steel Permanent Drive Cap

Aluminum Female Barrel: Barrel Dia. 13/64", 8-32 Threads, Head Dia. 13/32", Head Height .040/.070". **Permanent Drive Screw:** Steel with Nickel Plating. No Slot— These are tapped in, and cannot be unscrewed. Head Dia. .375-.410". Thread is spiral U Drive for permanent installation, .150" diameter.

Aluminum Binding Post Barrel & Steel Permanent Drive Cap									
	Female	Male	Female	Male					
Grip	Barrel	Screw	Barrel	Screw	Quantity of	Set			
Range	Length	Length	Order Number	Order Number	Each Part	Order Number			
3/8"	3/8"	3/8"	Z4306X	Z4684	50	Z4306XCAP			
1/2	1/2	3/8	Z4308	Z4684	50	Z4308CAP			
5/8	5/8	3/8	Z4310	Z4684	50	Z4310CAP			
3/4	3/4	3/8	Z4312	Z4684	50	Z4312CAP			
7/8	7/8	3/8	Z4314X	Z4684	50	Z4314XCAP			
1	1	3/8	Z4316X	Z4684	25	Z4316XCAP			
1-1/4	1-1/4	3/8	Z4320	Z4684	25	Z4320CAP			
1-1/2	1-1/2	3/8	Z4324	Z4684	25	Z4324CAP			
1-3/4	1-3/4	3/8	Z4328	Z4684	25	Z4328CAP			
2	2	3/8	Z4332	Z4684	25	Z4332CAP			

Truss Head Black Anodized Aluminum—Female Barrels

Truss Head Binding Post—Female—Black Anodized Aluminum Tapped Thru The Head								
Barrel	Barrel	Head	Head		Thread	Order		
Length	Diameter	Diameter	Height	Threads	Depth	Number		
1/8"	13/64	13/32	.050070	8-32	Unlimited	Z4302-BK		
3/16"	13/64	13/32	.050070	8-32	Unlimited	Z4303-BK		
1/4"	13/64	13/32	.050070	8-32	Unlimited	Z4304-BK		
3/8"	13/64	13/32	.050070	8-32	Unlimited	Z4306-BK		

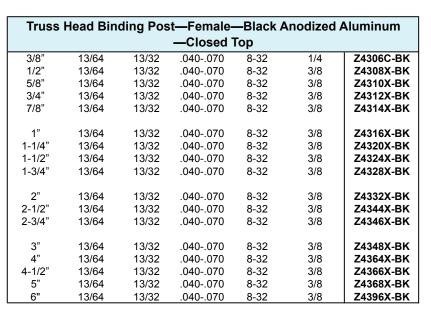







SPECIAL ORDERS AVAILABLE— Small Quantities to Large Volume






Sex Bolts &



Truss Head Black Anodized Aluminum—Male Screws



Black Anodized Aluminum Binding Post Screws								
Screw Size	Order Number							
8-32 X 3/16	13/32	.050070	Z4302S-BK					
8-32 X 1/4	13/32	.050070	Z4301-BK					
8-32 X 3/8	13/32	.050070	Z4300-BK					



Truss Head Black Anodized Aluminum—Sets

Female Barrel has no slot — Male Screw has Slotted Truss Head Male Screw and Female Barrel Packaged Together as Set

	A	luminum E	Binding Po	ost Sets—Blac	k Anodized A	luminum		
	Female	Female	Male	Female	Male			
Grip	Barrel	Thread	Screw	Barrel	Screw	Quantity of	Set	
Range	Length	Depth	Length	Order Number	Order Number	Each Part	Order Number	
1/8"	1/8"	OPEN	3/16"	Z4302-BK	Z4302S-BK	25	Z4374150	
3/16	3/16	OPEN	3/16	Z4303-BK	Z4302S-BK	25	Z4374151	
1/4	1/4	OPEN	3/8	Z4304-BK	Z4300-BK	25	Z4374100	
3/8	3/8	OPEN	3/8	Z4306-BK	Z4300-BK	25	Z4374102	
1/2	1/2	1/4"	3/8	Z4308X-BK	Z4300-BK	25	Z4374103	
5/8	5/8	3/8	3/8	Z4310X-BK	Z4300-BK	25	Z4374152	
3/4	3/4	3/8	3/8	Z4312X-BK	Z4300-BK	25	Z4374153	
7/8	7/8	3/8	3/8	Z4314X-BK	Z4300-BK	25	Z4374154	
1	1	3/8	3/8	Z4316X-BK	Z4300-BK	10	Z4374155	
1-1/4	1-1/4	3/8	3/8	Z4320X-BK	Z4300-BK	10	Z4374156	
1-1/2	1-1/2	3/8	3/8	Z4324X-BK	Z4300-BK	10	Z4374157	
1-3/4	1-3/4	3/8	3/8	Z4328X-BK	Z4300-BK	5	Z4374158	
2	2	3/8	3/8	Z4332X-BK	Z4300-BK	5	Z4374159	
2-1/2	2-1/2	3/8	3/8	Z4344X-BK	Z4300-BK	5	Z4374160	
3	3	3/8	3/8	Z4348X-BK	Z4300-BK	5	Z4374161	
4	4	3/8	3/8	Z4364X-BK	Z4300-BK	5	Z4374162	
5	5	3/8	3/8	Z4368X-BK	Z4300-BK	5	Z4374163	
6	6	3/8	3/8	Z4396X-BK	Z4300-BK	5	Z4374164	



18-8 Stainless Steel Binding Posts—Open Truss Head Female Barrels

18-8 Stainless Steel Binding Posts—Female—Open Truss Head						
Barrel	Barrel	Head	Head		Thread	Order
Length	Diameter	Diameter	Height	Threads	Depth	Number
1/8"	13/64"	13/32"	.050070"	8-32	Unlimited	Z4302X-SS
3/16"	13/64	13/32	.050070	8-32	Unlimited	Z4303-SS
1/4"	13/64	13/32	.050070	8-32	Unlimited	Z4304-SS










18-8 Stainless Steel Binding Posts—Female—Truss Head

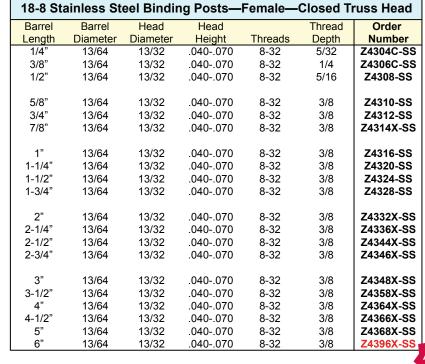

18-8 Stainless Steel Binding Posts Sets

		Bindin	g Post Sets	— 18/8 Stainle	ess Steel		
			Male	Female	Male		
Grip	Female Barrel	Female Thread	Screw	Barrel	Screw	Quantity of	Set
Range	Length	Depth	Length	Order Number	Order Number	Each Part	Order Number
1/8"	1/8"	OPEN	3/16"	Z4302X-SS	Z4302-SS	25	Z4374050
3/16	3/16	OPEN	3/16	Z4303-SS	Z4302-SS	25	Z4374051
1/4	1/4	OPEN	1/4	Z4304-SS	Z4301-SS	25	Z4374052
3/8	3/8	1/4"	3/8	Z4306C-SS	Z4300-SS	25	Z4374053
3/8	3/8	1/4"	3/8	Z4306C-SS	Z4300-SS	10	Z4374053-10
10	410	5// 0"	0.10	7/000 00	7/000.00	10	
1/2	1/2	5/16"	3/8	Z4308-SS	Z4300-SS	10	Z4374054
5/8	5/8	3/8	3/8	Z4310-SS	Z4300-SS	10	Z4374055
3/4	3/4	3/8	3/8	Z4312-SS	Z4300-SS	10	Z4374056
1	1	3/8	3/8	Z4316-SS	Z4300-SS	10	Z4374057
1-1/4	1-1/4	3/8	3/8	Z4320-SS	Z4300-SS	10	Z4374058
1-1/2	1-1/2	3/8	3/8	Z4324-SS	Z4300-SS	10	Z4374059
1-3/4	1-3/4	3/8	3/8	Z4328-SS	Z4300-SS	10	Z4374060
2	2	3/8	3/8	Z4332X-SS	Z4300-SS	5	Z4374105
2-1/4	2-1/4	3/8	3/8	Z4332X-33 Z4336X-SS	Z4300-33 Z4300-SS	5	Z4374105 Z4374106
			3/8	Z4330A-55 Z4344X-SS			Z4374106 Z4374107
2-1/2	2-1/2 2-3/4	3/8 3/8	3/8		Z4300-SS	5 5	
2-3/4	2-3/4	3/8	3/8	Z4346X-SS	Z4300-SS	5	Z4374108
3	3	3/8	3/8	Z4348X-SS	Z4300-SS	5	Z4374109
3-1/2	3-1/2	3/8	3/8	Z4358X-SS	Z4300-SS	5	Z4374110
4	4	3/8	3/8	Z4364X-SS	Z4300-SS	5	Z4374111
4-1/2	4-1/2	3/8	3/8	Z4366X-SS	Z4300-SS	5	Z4374112
_	F	2/9	2/9	742602 66	74200 66	_	Z4374113
5	5	3/8	3/8	Z4368X-SS	Z4300-SS	5	
6	6	3/8	3/8	Z4396X-SS	Z4300-SS	5	Z4374114

Female Barrel has no slot—Male Screw has Slotted Truss Head Stainless Steel—Male and Female Barrel Packaged Together





SPECIAL ORDERS AVAILABLE— Small Quantities to Large Volume




Phone: 317-472-9000 • FAX: 317-472-9010 • email: sales@ampg.com • www.ampg.com

 $\bigcirc \ominus$

18-8 Stainless Steel Binding Screws

18-8 Stai	nless Ste	el Binding	Screws
Screw	Head	Head	Order
Size	Diameter	Height	Number
8-32 X 3/16	13/32	.050070	Z4302-SS
8-32 X 1/4	13/32	.050070	Z4301-SS
8-32 X 3/8	13/32	.050070	Z4300-SS





Brass Binding Posts—Female—Open Truss Head

Bras	ss Binding	g Posts–	-Female Ba	rrels—(Open Trus	s Head
1/8"	13/64	13/32	.050070	8-32	Unlimited	Z4302X-BR
3/16"	13/64	13/32	.050070	8-32	Unlimited	Z4303-BR
1/4"	13/64	13/32	.050070	8-32	Unlimited	Z4304-BR
3/8"	13/64	13/32	.050070	8-32	Unlimited	Z4306X-BR



Brass Binding Posts—Female—Closed Truss Head

Bras	s Binding	Posts—F	emale Ba	rrels—Cl	osed Tru	ss Head
Barrel	Barrel	Head	Head		Thread	Order
Length	Diameter	Diameter	Height	Threads	Depth	Number
1/4"	13/64	13/32	.040070	8-32	5/32	Z4304C-BR
3/8"	13/64	13/32	.040070	8-32	1/4	Z4306-BR
1/2"	13/64	13/32	.040070	8-32	5/16	Z4308-BR
5/8"	13/64	13/32	.040070	8-32	3/8	Z4310-BR
3/4"	13/64	13/32	.040070	8-32	3/8	Z4312-BR
7/8"	13/64	13/32	.040070	8-32	3/8	Z4314X-BR
1"	13/64	13/32	.040070	8-32	3/8	Z4316-BR
1-1/4"	13/64	13/32	.040070	8-32	3/8	Z4320X-BR
1-1/2"	13/64	13/32	.040070	8-32	3/8	Z4324X-BR
1-3/4"	13/64	13/32	.040070	8-32	3/8	Z4328X-BR
2"	13/64	13/32	.040070	8-32	3/8	Z4332X-BR
2-1/4"	13/64	13/32	.040070	8-32	3/8	Z4336X-BR
2-1/2"	13/64	13/32	.040070	8-32	3/8	Z4344X-BR
2-3/4"	13/64	13/32	.040070	8-32	3/8	Z4346X-BR
3"	13/64	13/32	.040070	8-32	3/8	Z4348X-BR
3-1/2"	13/64	13/32	.040070	8-32	3/8	Z4358X-BR
4"	13/64	13/32	.040070	8-32	3/8	Z4364X-BR
4-1/2"	13/64	13/32	.040070	8-32	3/8	Z4366X-BR
5"	13/64	13/32	.040070	8-32	3/8	Z4368X-BR
6"	13/64	13/32	.040070	8-32	3/8	Z4396X-BR












Brass Binding Screws




Brass Binding Screws Screw Head Head Order Size Diameter Height Number 8-32 X 1/4 13/32 .050-.070 Z4301-BR 8-32 X 5/16 13/32 .050-.070 Z4300-BR



Brass Binding Post Sets

Female Barrel has no slot-

Male Screw has Slotted Truss Head Plain Brass—Male and Female Barrel Packaged Together



Brass Binding Post Sets									
	Female	Female	Male	Female	Male	Quantity	Set		
Grip	Barrel	Thread	Screw	Barrel	Screw	of Each	Order		
Range	Length	Depth	Length	Order Number	Order Number	Part	Number		
3/16"	3/16"	OPEN	1/4"	Z4303-BR	Z4301-BR	25	Z4374001		
1/4"	1/4"	OPEN	1/4"	Z4304-BR	Z4301-BR	25	Z4374002		
3/8"	3/8"	1/4"	5/16"	Z4306-BR	Z4300-BR	25	Z4374003		
1/2"	1/2"	3/8"	5/16"	Z4308-BR	Z4300-BR	25	Z4374004		
5/8"	5/8"	3/8"	5/16"	Z4310-BR	Z4300-BR	25	Z4374120		
3/4"	3/4"	3/8"	5/16"	Z4312-BR	Z4300-BR	25	Z4374005		
7/8"	7/8"	3/8"	5/16"	Z4314X-BR	Z4300-BR	10	Z4374121		
1"	1"	3/8"	5/16"	Z4316-BR	Z4300-BR	10	Z4374006		
1-1/4"	1-1/4"	3/8"	5/16"	Z4320X-BR	Z4300-BR	10	Z4374122		
1-1/2"	1-1/2"	3/8"	5/16"	Z4324X-BR	Z4300-BR	10	Z4374123		
1-3/4"	1-3/4"	3/8"	5/16"	Z4328X-BR	Z4300-BR	10	Z4374124		
2"	2"	3/8"	5/16"	Z4332X-BR	Z4300-BR	10	Z4374125		
2-1/4"	2-1/4"	3/8"	5/16"	Z4336X-BR	Z4300-BR	5	Z4374126		
2-1/2"	2-1/2"	3/8"	5/16"	Z4344X-BR	Z4300-BR	5	Z4374127		
2-3/4"	2-3/4"	3/8"	5/16"	Z4346X-BR	Z4300-BR	5	Z4374128		
3"	3"	3/8"	5/16"	Z4348X-BR	Z4300-BR	5	Z4374129		
3-1/2"	3-1/2"	3/8"	5/16"	Z4358X-BR	Z4300-BR	5	Z4374130		
4"	4"	3/8"	5/16"	Z4364X-BR	Z4300-BR	5	Z4374131		
4-1/2"	4-1/2"	3/8"	5/16"	Z4366X-BR	Z4300-BR	5	Z4374132		
5"	5"	3/8"	5/16"	Z4368X-BR	Z4300-BR	5	Z4374133		
6"	6"	3/8"	5/16"	Z4396X-BR	Z4300-BR	5	Z4374134		



SPECIAL ORDERS AVAILABLE— Small Quantities to Large Volume






2 Phone: 317-472-9000 • FAX: 317-472-9010 • *email: sales@ampg.com* • www.ampg.com

Sex Bolts & Mating Fastene

Binding Posts


Copper Binding Posts—Female—Closed Truss Head

	Copper Binding Posts — Closed Top Rivet Head									
Barrel Length	Barrel Diameter	Head Diameter	Head Height	Threads	Thread Depth	Order Number				
1/4"	13/64"	13/32"	.040070	8-32	5/32"	Z4304C-CU				
3/8"	13/64"	13/32"	.040070	8-32	1/4"	Z4306-CU				
1/2"	13/64"	13/32"	.040070	8-32	5/16"	Z4308-CU				
5/8"	13/64"	13/32"	.040070	8-32	3/8"	Z4310-CU				
3/4"	13/64"	13/32"	.040070	8-32	3/8"	Z4312-CU				
1"	13/64"	13/32"	.040070	8-32	3/8"	Z4316-CU				



Solid Copper Binding Screws—Slotted Head

Copper Binding Screws — Slotted Head							
Screw	Head	Head	Order				
Size	Diameter	Height	Number				
8-32 X 1/4	13/32"	.040070	Z4301-CU				
8-32 X 3/8	13/32"	.040070	Z4300-CU				



Copper Binding Post Sets

Female Barrel has no slot— Male Screw has Slotted Truss Head Plain Brass—Male and Female Barrel Packaged Together

	Copper Binding Post Sets — Closed Top Rivet Head										
	Female Female Male Female Male										
Grip	Barrel	Thread	Screw	Barrel	Screw	Quantity of	Set				
Range	Length	Depth	Length	Order Number	Order Number	Each Part	Order Number				
1/4"	1/4"	1/8"	3/8"	Z4304C-CU	Z4300-CU	10	Z4374140				
3/8"	3/8"	1/4"	3/8"	Z4306-CU	Z4300-CU	10	Z4374141				
1/2"	1/2"	3/8"	3/8"	Z4308-CU	Z4300-CU	10	Z4374142				
5/8"	5/8"	3/8"	3/8"	Z4310-CU	Z4300-CU	10	Z4374143				
3/4"	3/4"	3/8"	3/8"	Z4312-CU	Z4300-CU	10	Z4374144				
1"	1"	3/8"	3/8"	Z4316-CU	Z4300-CU	10	Z4374145				







Steel–Zinc Plated Binding Posts—Female Barrels



	Steel–Zinc Plated Binding Posts—Female Barrels										
Barrel	Barrel	Head	Head		Thread	Order					
Length	Diameter	Dia.	Height	Threads	Depth	Number					
1/8	13/64	13/32	.050070	8-32	Thru	Z4302X-STL					
3/16	13/64	13/32	.050070	8-32	Thru	Z4303-STL					
1/4	13/64	13/32	.050070	8-32	Thru	Z4304-STL					
3/8	13/64	13/32	.050070	8-32	1/4	Z4306C-STL					
1/2	13/64	13/32	.050070	8-32	3/8	Z4308-STL					
5/8	13/64	13/32	.050070	8-32	3/8	Z4310-STL					
3/4	13/64	13/32	.050070	8-32	3/8	Z4312-STL					
1	13/64	13/32	.050070	8-32	3/8	Z4316-STL					
1-1/4	13/64	13/32	.050070	8-32	3/8	Z4320-STL					
1-1/2	13/64	13/32	.050070	8-32	3/8	Z4324-STL					
1-3/4	13/64	13/32	.050070	8-32	3/8	Z4328-STL					
2	13/64	13/32	.050070	8-32	3/8	Z4332-STL					

Steel–Zinc Binding Post Sets

Male

Screw

Order Number

Z4302-STL

Z4302-STL

Z4302-STL

Z4302-STL

Z4300-STL

Z4300-STL

Z4300-STL

Z4300-STL

Z4300-STL

Z4300-STL

Z4300-STL

Female

Barrel

Order Number

Z4302X-STL

Z4303-STL

Z4304-STL

Z4306C-STL

Z4308-STL

Z4310-STL


Z4312-STL


Z4316-STL

Z4320-STL

Z4324-STL

Z4328-STL







Steel–Zinc Plated Binding Screws—Slotted Head

Steel Zinc Binding Screws							
Screw	Head	Head	Order				
Size	Diameter	Height	Number				
8-32 x 3/16	13/32	.050070	Z4302-STL	New			
8-32 X 3/8	13/32	.050070	Z4300-STL •	Items in			

Male

Screw

Length

3/16

3/16

3/16

3/16

3/8

3/8

3/8

3/8

3/8

3/8

3/8

3/8

Steel–Zinc Plated Binding Post Sets

Female

Thread

Depth

Thru

Thru

Thru

1/4

3/8

3/8

3/8

3/8

3/8

3/8

3/8

3/8

Female

Barrel

Length

1/8

3/16

1/4

3/8

1/2

5/8

3/4

1

1-1/4

1-1/2

1-3/4

2

Grip

Range

1/8

3/16

1/4

3/8

1/2

5/8

3/4

1

1-1/4

1 - 1/2


1-3/4

2



SPECIAL ORDERS AVAILABLE— Small Quantities to Large Volume





Quantity of

Each Part

25

25

25

25

25

25

25

10

10

10

10

Set

Order Number

Z4302XPAK-STL

Z4303PAK-STL

Z4304PAK-STL

Z4306CPAK-STL

Z4308PAK-STL

Z4310PAK-STL

Z4312PAK-STL

Z4316PAK-STL

Z4320PAK-STL

Z4324PAK-STL

Z4328PAK-STL

Group





Order

Number

Z4683

Z4682

Black Plastic Caps

Head

Height

7/64"

.075"

Black Plastic Binding Post Caps Permanent or Removable

REMOVABLE: Slotted Binding Head

PERMANENT: Unslotted Flat Head

Black Plastic Binding Post Barrels—Friction Fit

Plastic Binding Post Barrels: For use in 1/4" diameter holes. Barrel Diameter .215-.240. Slotted Truss Head, .100" Head Height. Friction Fit Internal Thread.

Black Plastic Binding Posts— Female Barrels—Friction Fit										
Female										
Grip	Female Barrel	Head	Barrel							
Range	Length	Diameter	Order Number							
1/2"	1/2"	25/64"	Z4670							
5/8	5/8	25/64	Z4671							
3/4	3/4	25/64	Z4672							
1	1	25/64	Z4673							
1-1/4	1-1/4	25/64	Z4674							
1-1/2	1-1/2	25/64	Z4675							
1-3/4	1-3/4	25/64	Z4676							
2	2	25/64	Z4677							
2-1/4	2-1/4	27/64	Z4678							
2-1/2	2-1/2	27/64	Z4679							
3-1/4	3-1/4	27/64	Z4680							
4	4	27/64	Z4681							

Female Plastic Binding Posts—Slotted Head

Plastic Binding Posts—Female Barrels—Slotted Head									
Barrel	Barrel	Head	Head		Thread			Order	
Length	Diameter	Diameter	Height	Threads	Depth	Material	Color	Number	
1/4"	.240"	3/8"	.100"	10-24	3/16"	Plastic	Black	Z4200	
1/4	.240	3/8	.100	10-24	3/16	Plastic	White	Z4209	
3/8	.240	3/8	.100	10-24	3/16	Plastic	Black	Z4201	
3/8	.240	3/8	.100	10-24	3/16	Plastic	White	Z4210	
1/2	.240	3/8	.100	10-24	3/16	Plastic	Black	Z4202	
1/2	.240	3/8	.100	10-24	3/16	Plastic	White	Z4211	
3/4	.240	3/8	.100	10-24	3/16	Plastic	Black	Z4203	
3/4	.240	3/8	.100	10-24	3/16	Plastic	White	Z4212	
7/8	.240	3/8	.100	10-24	3/16	Plastic	Black	Z4204	
1	.240	3/8	.100	10-24	3/16	Plastic	Black	Z4205	
1-1/4	.240	3/8	.100	10-24	3/16	Plastic	Black	Z4206	
1-1/2	.240	3/8	.100	10-24	3/16	Plastic	Black	Z4207	
2	.240	3/8	.100	10-24	3/16	Plastic	Black	Z4208	

Plastic Binding Post Screws—Threaded—Slot Head

	Plastic Binding Post Male Screws—Slotted Head									
	Head	Head				Order				
Size	Diameter	Height	Threads	Material	Color	Number				
10-24 X 3/16	3/8"	.100"	10-24	Plastic	Black	Z4219				
10-24 X 3/16	3/8	.100	10-24	Plastic	White	Z4218				

Black Plastic Binding Post Sets

	Black Plastic Binding Post Sets									
Grip Range	Female Barrel Length	Female Thread Depth	Female Barrel Order Nbr	Male Screw Order Nbr	Qty of Each Part	Order Number				
1/2	1/2	3/16	Z4202	Z4219	10	Z4202SET				
3/4	3/4	3/16	Z4203	Z4219	10	Z4203SET				
1	1	3/16	Z4205	Z4219	10	Z4205SET				
1-1/4	1-1/4	3/16	Z4206	Z4219	10	Z4206SET				
1-1/2	1-1/2	3/16	Z4207	Z4219	10	Z4207SET				
2	2	3/16	Z4208	Z4219	10	Z4208SET				









Slotted Head Sex Bolts



Slotted Truss Head—Female Barrels

3/64 WIDE TO END OF .05 FLAT ON HEAD -

Г

These Sex Bolts have slotted Truss Heads, no knurl under the head, no mating screw. Available in Steel, Steel-Zinc, Plain Brass, Brass Chrome, Stainless Steel, & Aluminum











SPECIAL ORDERS AVAILABLE— Small Quantities to Large Volume



BARREL LENGTH -.05 THREAD DEPTH HEAD DIAMETER đ



BARREL DIAMETER

Slotted Truss Head Sex Bolts—Female Barrels								
Barrel Diameter	Barrel Length	Thread Size	Thread Depth	Head Diameter	Head Height	Plating	Order Number	
		:		Various I		S		
13/64 13/64	3/8 3/8	8-32 8-32	1/4 1/4	7/16 7/16	9/64 9/64	Brass Black Ox	Z4560-BR Z4560-BX	
13/04	5/0			nc Platec			24300-DA	
13/64	3/8	8-32	1/4	7/16	9/64	Zinc	Z4560-ZN	
1/4	1/4	0.22	200	2/0	1/8	Zino	74500	
1/4 1/4	1/4	8-32 8-32	.200 1/4	3/8 3/8	1/8	Zinc Zinc	Z4500 Z4505	
1/4	3/4	8-32	1/2	3/8	1/8	Zinc	Z4510	
1/4	1	8-32	1/2	3/8	1/8	Zinc	Z4520	
5/16	5/8	1/4-20	1/2	1/2	9/64	Zinc	Z4552	
5/16	3/4	10-32	1/2	7/16	9/64	Zinc	Z4535	
3/8	3/4	1/4-20	1/2	9/16	5/32	Zinc	Z4541	
3/8	1	1/4-20	1/2	9/16	5/32	Zinc	Z4542	
3/8	1-9/16	1/4-20	3/4	9/16	3/16	Zinc	Z4570	
				ass Mate	rial			
1/4	1/4	8-32	.200	3/8	1/8	Chrome	Z4600	
1/4 1/4	1/4 1/2	8-32 8-32	.200 1/4	3/8 3/8	1/8 1/8	Plain Chrome	Z4605 Z4610	
1/4	1/2	8-32 8-32	1/4	3/8	1/8	Plain	Z4615	
1/4	3/4	8-32	1/2	3/8	1/8	Chrome	Z4620	
1/4	3/4	8-32	1/2	3/8	1/8	Plain	Z4625	
1/4	1	8-32	1/2	3/8	1/8	Chrome	Z4630	
1/4	1	8-32	1/2	3/8	1/8	Plain	Z4635	
5/16	1/2	10-32	1/4	7/16	9/64	Chrome	Z4640	
5/16	1/2	10-32	1/4	7/16	9/64	None	Z4645	
5/16	3/4	10-32	1/2	7/16	9/64	Chrome	Z4650	
5/16	3/4	10-32	1/2	7/16	9/64	None	Z4655	
1/4	1/4	8-32	.200	ss Steel	1/8	None	Z4700	
1/4	1/4	8-32	.200	3/8	1/8	None	Z4705	
1/4	3/4	8-32	1/2	3/8	1/8	None	Z4710	
1/4	1	8-32	1/2	3/8	1/8	None	Z4715	
5/16	1/2	10-32	1/4	7/16	9/64	None	Z4720	
5/16	3/4	10-32	1/2	7/16	9/64	None	Z4725	
3/8	1/2	1/4-20	1/4	9/16	5/32	None	Z4730	
3/8	19/32	1/4-20	1/2	9/16	5/32	None	Z4731	
3/8	3/4	1/4-20	1/2	9/16 0/16	5/32	None	Z4732	
3/8	1	1/4-20	1/2 Δlum	9/16 ninum Ma	5/32	None	Z4734	
3/8	1/4	1/4-20	3/16	9/16	1/8	None	Z4842	
3/8	7/8	1/4-20	9/16	9/16	1/8	None	Z4844	

A46 Phone: 317-472-9000 • FAX: 317-472-9010 • email: sales@ampg.com • www.ampg.com

Accurate Manufactured Products Group

Sex Bolts & Mating Fasteners

THREAD SIZ

BARREL DIAMETER

THREAD SIZE

OVERALL LENGTH

3/64 -

 Θ

Grommet Nuts

Material

Steel Zinc

Steel Zinc

Steel Zinc

Steel Zinc

Steel Brass Plated

Steel Brass Plated

Steel Brass Plated

Steel Brass Plated

Stainless Steel

Stainless Steel

Stainless Steel

Stainless Steel

3/32

THREAD

Slotted Head Sex Bolts

Slotted Oval Head Sex Bolts—Female Barrels

Slotted Oval Head Sex Bolts are measured from over the head to the end of the barrel, and have a standard 82 degree countersunk head.

Slotted	Oval Hea	d Sex Bol	ts—Fema	ale Barrels	s (No Mating	Screw)
Barrel	Overall	Thread	Thread	Head	Material &	Order
Diameter	Length	Size	Depth	Diameter	Finish	Number
3/16"	19/64"	6-32	.200"	1/4"	Brass Nickel	Z4800
3/16	25/64	6-32	.200	9/32	Brass Nickel	Z4802
3/16	17/32	6-32	5/16	1/4	Brass Nickel	Z4804
3/16	43/64	6-32	3/8	3/8	Brass Nickel	Z4810
3/16	5/8	6-32	5/16	1/4	Brass Nickel	Z4806
1/4	7/16	8-32	1/4	23/64	Brass Nickel	Z4812
1/4	7/16	10-32	.275	11/32	Brass Nickel	Z4814
1/4	41/64	10-32	1/4	3/8	Steel Nickel	Z4816

Slotted Flat Head Sex Bolts—Female Barrels

Slotted Flat Head Sex Bolts are measured from over the head to the end of the barrel, and have a standard 82 degree countersunk head.

_							
	Screw)	(No Mating	le Barrels	ts—Fema	d Sex Bolt	Flat Head	Slotted
	Order	Material &	Head	Thread	Thread	Overall	Barrel
r	Number	Finish	Diameter	Depth	Size	Length	Diameter
	Z4830	Steel Zinc	5/16"	Thru	8-32	27/64"	13/64"
	Z4832	Brass Plain	5/16	Thru	8-32	1/2	13/64
Iter	Z4834	Brass Plain	5/16	Thru	8-32	3/4	13/64
R	Z5026	Stainless	1/2	Thru	10-32	7/16	5/16
	Z5028	Stainless	1/2	Thru	10-32	3/4	5/16
	Z5030	Stainless	1/2	Thru	10-32	1	5/16
	Z5035	Stainless	.715	Thru	5/16-18	3/4	.425
	Z5040	Stainless	.715	.600	5/16-18	1	.425

Grommet Nuts-Slot Head, No Slot, & Open Head

Steel Zinc, Steel Brass Plated, & Stainless Steel

Barrel

Diameter

5/16

5/16

3/8

1/2

5/16

5/16

3/8

1/2

5/16

5/16

3/8

1/2

Barrel

Length

1/2

1/2

1/2

1/2

1/2

1/2

1/2

1/2

1/2

1/2

1/2

1/2

For hinge installations - available with slot for ease of installation, or without any slot for security installations. Used on Full Surface, Half Surface and Half Mortise Hinges, Prison Hinges and Heavy duty Institutional Hinges. Also used for installing door closers, panic bars, exit devices, kick plates, push plates, and all types of surface mounted door hardware.

Thread

Size

10-32

12-24

1/4-20

3/8-16

10-32

12-24

1/4-20

3/8-16

10-32

12-24

1/4-20

3/8-16

Thread

Depth

1/4

1/4

1/4

1/4

1/4

1/4

1/4

1/4

1/4

1/4

1/4

1/4

Head

Diameter

7/16

7/16

9/16

3/4

7/16

7/16

9/16


3/4

7/16

7/16

9/16

3/4



No Slot

Order

Number

Z4521

Z4522

Z4523

Z4524

Z4525

Z4526

Z4527

Z4528

Z4529

Z4531

Z4532

Z4533

Open Head

. Fully Threaded

Order

Number

Z4750

Z4751

Z4752

Z4753

Z4760

Z4761

Z4762

Z4763

Z4770

Z4771

Z4772

Z4773

.02 M







Slotted

Order

Number

Z4530

Z4511

Z4540

Z4512

Z4518

Z4513

Z4514

Z4515

Z4720

Z4516

Z4730

Z4517














Phillips, Hex Head, & T Head Sex Bolts

Phillips Truss Head Sex Bolts—Female Barrels

These Sex Bolts have Phillips Truss Heads, no knurl under the head, no mating screw. Available in Stainless Steel & Steel Chrome

Hex Head Sex Bolts—Female Barrels

These Sex Bolts have Hex Heads, no knurl under the head, no mating screw. Available in Stainless Steel



THREAD

HEAD WIDTH -

HEAD HEIGHT

🥑 IMPORT

Phillips Truss Head Sex Bolts—Female Barrels									
Barrel Diameter	Barrel Length	Thread Size	Thread Depth	Head Diameter	Head Height	Material & Finish	Notes	Order Number	
3/16"	3/8"	6-32	1/4"	3/8"	3/32	Stainless	Serrations under head	Z4740	
7/32	3/8	8-32	1/4	7/16	3/32	Stainless	Serrations under head	Z4741	
1/4	1/2	10-24	3/8	9/16	9/64	Stainless	Serrations under head	Z4742	
1/4	1/2	10-24	3/8	13/32	1/8	Steel Chrome	Serrations under head	Z4850	
5/16	5/8	1/4-20	7/16	11/16	3/16	Stainless	Serrations under head	Z4743	
3/8	3/4	5/16-18	5/8	3/4	7/32	Stainless	Serrations under head	Z4744	
7/16	3/4	3/8-16	5/8	15/16	7/32	Stainless	Serrations under head	Z4745	

0



							THREAD SIZE	
H	ex Head S	Sex Bolts-	—Female	Barrels-	-Stainless	Steel		
Barrel	Barrel	Thread	Thread	Across	Head	Order		
Diameter	Length	Size	Depth	Flats	Height	Number		
5/16"	1/2"	10-24	5/16"	1/2"	3/16"	Z4180-SS		
5/16"	3/4	10-24	3/8	1/2	3/16	Z4181-SS		
5/16"	1	10-24	3/8	1/2	3/16	Z4182-SS		
3/8"	1/2	1/4-20	5/16"	5/8	13/64	Z4185-SS		
3/8"	3/4	1/4-20	3/8	5/8	13/64	Z4186-SS		
3/8"	1	1/4-20	3/8	5/8	13/64	Z4187-SS		
1/2"	1/2	3/8-16	5/16"	3/4	1/4	Z4190-SS		
1/2"	3/4	3/8-16	3/8	3/4	1/4	Z4191-SS		E
1/2"	1	3/8-16	3/8	3/4	1/4	Z4192-SS		

T Head Aluminum Sex Bolts/Binding Posts—Female Barrels

BARREL LENGTH -



SPECIAL ORDERS AVAILABLE— Small Quantities to Large Volume







HEAD LENGTH

Special "T Slot" style head is used in

commercial railing systems.

Sex Bolts & Mating Fasteners




\bigcirc

Connector Bolts & Nuts

Steel Connector Bolts (No Shoulder)


Connector Nuts and Bolts are used for joining any two parts or pieces together, with a finished appearance. Most commonly used to join panels together, such as cabinets, book cases, and other furniture fixtures. The hex drive allows maximum leverage and force to be applied to the connection. These fasteners have a low profile and beveled edges on the exposed head, presenting a decorative and finished look.



Available in Plain Steel, or with the following finishes: Black Oxide, Bronze, Nickel, Brass, or Zinc

	Connector Bolts (No Shoulder)								L
	L	L1	D						
	Length	Thread	Shank	Hex	Grip Ran				Order
Thread	Under Head	Length	Diameter	Drive	12MM Nut	17MM Nut	Material	Finish	Number *
	20MM (.787")	17MM (.669")	5.4MM (.213")	4MM (.157")	21–25	21–30	Steel	Plain	Z4478-A
	23MM (.906")	13MM (.512")	5.4MM (.213")	4MM (.157")	24–28	24–33	Steel	Plain	Z4479-A
1/4-20	25MM (.984")	22MM (.866")	5.4MM (.213")	4MM (.157")	26–30	26–35	Steel	Plain	Z4480-A
	30MM (1.181")	20MM (.787")	5.4MM (.213")	4MM (.157")	31–35	31–40	Steel	Plain	Z4481-A
	35MM (1.378")	30MM (1.181")	5.4MM (.213")	4MM (.157")	36–40	36-45	Steel	Plain	Z4482-A
	40MM (1.575")	30MM (1.181")	5.4MM (.213")	4MM (.157")	41–45	41–50	Steel	Plain	Z4483-A
	45MM (1.772")	30MM (1.181")	5.4MM (.213")	4MM (.157")	46-50	46-55	Steel	Plain	Z4484-A
1/4-20	50MM (1.969")	30MM (1.181")	5.4MM (.213")	4MM (.157")	51–55	51–60	Steel	Plain	Z4485-A
	60MM (2.362")	40MM (1.575")	5.4MM (.213")	4MM (.157")	61–65	61–70	Steel	Plain	Z4486-A
	70MM (2.756")	40MM (1.575")	5.4MM (.213")	4MM (.157")	71–75	71–80	Steel	Plain	Z4487-A
	80MM (3.150")	40MM (1.575")	5.4MM (.213")	4MM (.157")	81–85	81–90	Steel	Plain	Z4488-A
	90MM (3.543")	40MM (1.575")	5.4MM (.213")	4MM (.157")	91–95	91–100	Steel	Plain	Z4489-A
1/1-20	100MM (3.937")	40MM (1.575")	5.4MM (.213")	4MM (.157")	101–105	101–110	Steel	Plain	Z4490-A
	110MM (4.331")	40MM (1.575")	5.4MM (.213")	4MM (.157")	111–115	111–120	Steel	Plain	Z4491-A
	MM (4.724")	40MM (1.575")	5.4MM (.213")	4MM (.157")	121–125	121–130	Steel	Plain	Z4492-A
	40MM (1.575")	30MM (1.181")	7MM (.276")	5MM (.197")	N/A	41–50	Steel	Plain	Z4493-A
	50MM (1.969")	30MM (1.181")	7MM (.276")	5MM (.197")	N/A	51–60	Steel	Plain	Z4494-A
5/16-18	60MM (2.362")	40MM (1.575")	7MM (.276")	5MM (.197")	N/A	61–70	Steel	Plain	Z4495-A
5/10-18	70MM (2.756")	40MM (1.575")	7MM (.276")	5MM (.197")	N/A	71–80	Steel	Plain	Z4496-A
	80MM (3.150")	40MM (1.575")	7MM (.276")	5MM (.197")	N/A	81–90	Steel	Plain	Z4497-A
	100MM (3.937")	40MM (1.575")	7MM (.276")	5MM (.197")	N/A	101–110	Steel	Plain	Z4498-A

Steel Connector Bolts (With Shoulder)



	Connector Bolts (With Shoulder)							STEE	L
Thread	L Length Under Head	L1 Thread Length	L2 Shoulder Length	Hex Drive	Grip Rar 12MM Nut	ige (MM) 17MM Nut	Material	Finish	Order Number *
1/4-20	23MM (.906")	13MM (.512")	10MM (.394")	5MM (.197")	24–28	24–33	Steel	Plain	Z4467-A
	30MM (1.181")	20MM (.787")	10MM (.394")	5MM (.197")	31–35	31–40	Steel	Plain	Z4468-A
	35MM (1.378")	25MM (.984")	10MM (.394")	5MM (.197")	36–40	36–45	Steel	Plain	Z4469-A
	40MM (1.575")	30MM (1.181")	10MM (.394")	5MM (.197")	41–45	41–50	Steel	Plain	Z4470-A
	45MM (1.772")	35MM (1.378")	10MM (.394")	5MM (.197")	46–50	46–55	Steel	Plain	Z4471-A
1/4-20	50MM (1.969")	40MM (1.575")	18MM (.709")	5MM (.197")	51–55	51–60	Steel	Plain	Z4472-A
	60MM (2.362")	35MM (1.378")	18MM (.709")	5MM (.197")	61–65	61–70	Steel	Plain	Z4473-A
	70MM (2.756")	35MM (1.378")	18MM (.709")	5MM (.197")	71–75	71–80	Steel	Plain	Z4474-A
	80MM (3.150")	35MM (1.378")	18MM (.709")	5MM (.197")	81–85	81–90	Steel	Plain	Z4475-A
	90MM (3.543")	35MM (1.378")	18MM (.709")	5MM (.197")	91–95	91–100	Steel	Plain	Z4476-A
	100MM (3.937")	35MM (1.378")	18MM (.709")	5MM (.197")	101–105	101–110	Steel	Plain	Z4477-A

Connector Nuts

L1

Thread

Depth

8MM (.315")

13MM (.512")

13MM (.512")

Steel Connector Nuts

Thread

1/4-20

1/4-20

5/16-18

Available in Plain Steel, or with the following finishes: Black Oxide, Bronze, Nickel, Brass, or Zinc

L

Barrel

Length


12MM (.472")

17MM (.669")

17MM (.669")









* REPLACE "A" IN THE ORDER NUMBERS WITH THE FOLLOWING CODE FOR A FINISH OTHER THAN PLAIN STEEL						
CODE	FINISH					
BX	BLACK OXIDE PLATED					
BZ	BRONZE PLATED					
NI	NICKEL PLATED					
BR	BRASS PLATED					
ZN ZINC PLATED						
ZN ZINC PLATED						



NUMBER	* REPLACE "A" IN THE ORDER NUMBERS WITH THE FOLLOWING CODE FOR A FINISH OTHER THAN PLAIN STEEL					
CODE FINISH						
BX	BLACK OXIDE PLATED					
BZ	BRONZE PLATED					
NI	NICKEL PLATED					
BR	BRASS PLATED					
ZN	ZINC PLATED					



NICKEL PLATED

BRASS PLATED

ZINC PLATED

ΖN



Manufactured Phone: 317-472-9000 • FAX: 317-472-9010 • email: sales@ampg.com • www.ampg.com

Material

Steel

Steel

Steel

D3

Barrel

Diameter

9MM (.354")

9MM (.354")

11MM (.433")



Sex Bolt Assortment Kits



Binding Post Assortment Kits—Aluminum, Brass, Stainless Steel

Features:

- 5 of the most popular internal thread female Binding Posts
- Matching screw fits in each barrel—total number of screws matches the number of barrels included
- Seeing the item makes it easy for your customer to figure out the right size
- · Easy guide to re-order
- Use this Counter Display to show customers this hard to find product line!
- AVAILABLE FROM OUR STOCK IN ALUMINUM, BRASS, & 18-8 STAINLESS STEEL

Aluminum Assortment Kit Order # Z4195 18-8 Stainless Steel Assortment Kit Order # Z4196 Brass Assortment Kit...... Order # Z4197

Z4300(SS/BR)	Z4308(SS/BR)	Z4312(SS/BR)	Z4320(SS/BR)	Z4332(XSS/XBR)	Z4348(XSS/XBR)
8-32 X 3/8	13/64 X 1/2	13/64 X 3/4	13/64 X 1-1/4	13/64 X 2"	13/64 X 3"
SLOTTED	BINDING POST	BINDING POST	BINDING POST	BINDING POST	BINDING POST
BINDING POST	8-32 INTERNAL	8-32 INTERNAL	8-32 INTERNAL	8-32 INTERNAL	8-32 INTERNAL
MACHINE SCREW	THREADS	THREADS	THREADS	THREADS	THREADS
	_	-			-
Qty: 120 Pcs	Qty: 40 Pcs	Qty: 30 Pcs	Qty: 26 Pcs	Qty: 14 Pcs	Qty: 10 Pcs

Binding Post Assortment Kits—Steel Zinc

Features:

- 5 of the most popular internal thread female Binding Posts
- Matching screw fits in each barrel-total number of screws matches the number of barrels included
- · Seeing the item makes it easy for your customer to figure out the right size
- Easy guide to re-order
- Use this Counter Display to show customers this hard to find product line!

Steel Zinc Assortment Kit...... Order # Z4198

Z4300-STL	Z4308-STL	Z4312-STL	Z4316-STL	Z4324-STL	Z4332-STL
8-32 X 3/8	13/64 X 1/2	13/64 X 3/4	13/64 X 1"	13/64 X 1-1/2"	13/64 X 2"
SLOTTED	BINDING POST	BINDING POST	BINDING POST	BINDING POST	BINDING POST
BINDING POST	8-32 INTERNAL	8-32 INTERNAL	8-32 INTERNAL	8-32 INTERNAL	8-32 INTERNAL
MACHINE SCREW	THREADS	THREADS	THREADS	THREADS	THREADS
Qty: 120 Pcs	Qty: 40 Pcs	Qty: 30 Pcs	Qty: 26 Pcs	Qty: 14 Pcs	Qty: 10 Pcs

Solar Install Kit—18-8 Stainless Steel, 530 Pcs.

Features:

- Everything you need to install solar panels on a standard racking system, including: Flange Nuts, Fender Washers, Truss Head Sex Bolts, Tamperproof 6-Lobe with Pin Barrels, Combo-Head Barrels, T-Handle Bolts, Hanger Bolts, & Fully Threaded Studs
- Steel Box with Compartments

Solar Install Kit..... Order # ZSolarkit1



SPECIAL ORDERS AVAILABLE-Small Quantities to Large Volume



Phone: 317-472-9000 • FAX: 317-472-9010 • email: sales@ampg.com • www.ampg.com

Accurate Manufactured Products Group



Sex Bolt Assortment Kits

⊘IMPORT & USA∕∭MADE



18-8 Stainless Steel Sex Bolt Assortment Kit

Z4379PAK	Z4380PAK	Z4381PAK	Z4382PAK	Z4105SSPAK	Z4126SSPAK
Bathroom Partition Sex Bolts— assembled sets of male and female. 1/2" Grip Range, 1/4" Shoulder Dia.	Bathroom Partition Sex Bolts— assembled sets of male and female. 3/4" Grip Range, 1/4" Shoulder Dia.	Bathroom Partition Sex Bolts— assembled sets of male and female. 1" Grip Range, 1/4" Shoulder Dia.	Bathroom Partition Sex Bolts— assembled sets of male and female. 1-1/4" Grip Range, 1/4" Shoulder Dia.	Screw 18-8 P/Ns	13/64" Barrel Dia X 1/2" Lth 18-8 St/St with 8-32 Threads Combo Head Barrel Bolt with 8-32 X 5/16 Mating Male Screw 18-8 P/Ns Z4126SS + Z4075SS
Qty: 10 Sets	Qty: 10 Sets	Qty: 10 Sets	Qty: 10 Sets	Qty: 10 Sets	Qty: 10 Sets
Z4416SSPAK	Z4146SSPAK	Z5025	Z5125	Z5225	Z5325
1/4" Barrel Dia X 1" Lth 18-8 St/St with 10-24 Threads Combo Head Barrel Bolt with 10-24 X 5/16 Mating Male Screw 18-8 P/Ns Z4416SS + Z4085SS	1/2" Lth 18-8 St/St with 5/16-18 Threads Combo Head Barrel Bolt with 5/16-18 X 5/16 Mating Male Screw 18-8 P/Ne 74146SS	5/16 Barrel X 1-3/16" Lth 18-8 St/St Architectural Sex Bolt & Mating Screw	5/16 Barrel X 1-9/16" Lth 18-8 St/St Architectural Sex Bolt & Mating Screw	Lth 18-8 St/St Architectural Sex	3/8 Barrel X 2-1/16" Lth 18-8 St/St Architectural Sex Bolt & Mating Screw

eatures:

- 12 of the most popular 18-8 Stainless Steel
- internal thread Sex Bolts • 4 of the most popular Bathroom Partition Sets—18-8 S/S in 1/2", 3/4", 1", and 1-1/4"
- Grip Ranges
- All male and female Sets come assembled
- Assembled sets make it easy to figure out the right size
- Easy guide to re-order
 Use this Counter Display
- to show customers this hard to find product line!



18-8 Stainless Steel Combo Head Barrel Bolt Assortment Kit

Z4404SS	Z4406SS	Z4408SS	Z4412SS	Z4416SS	Z4424SS
1/4 Barrel Dia X 1/4" Lth (open head) with 10-24 Screw (Z4085SS)		1/4 Barrel Dia X 1/2" Lth with 10-24 Screw (Z4085SS)	1/4 Barrel Dia X 3/4" Lth with 10-24 Screw (Z4085SS)	1/4 Barrel Dia X 1" Lth with 10-24 Screw (Z4085SS)	1/4 Barrel Dia X 1-1/2" Lth with 10-24 Screw (Z4085SS)
Qty: 30 Sets	Qty: 30 Sets	Qty: 20 Sets	Qty: 20 Sets	Qty: 20 Sets	Qty: 10 Sets
Z4135SS	Z4443SS	Z4146SS	Z4126SS	Z4128SS	Z4125SS
5/16 Barrel Dia X 3/8" Lth with 1/4-20 Screw (Z4095SS)	5/16 Barrel Dia X 1/2" Lth with 1/4-20 Screw (Z4095SS)	3/8 Barrel Dia X 1/2" Lth with 5/16-18 Screw (Z4096SS)	13/64 Barrel Dia X 1/2" Lth with 8-32 Screw (Z4075SS)	13/64 Barrel Dia X 3/4" Lth with 8-32 Screw (Z4075SS)	13/64 Barrel Dia X 3/8" Lth with 8-32 Screw (Z4075SS)
Qty: 20 Sets	Qty: 10 Sets	Qty: 10 Sets	Qty: 30 Sets	Qty: 20 Sets	Qty: 30 Sets

18-8 S/S Combo Head Barrel Bolt Assortment Kit Order # Z4402-KIT

Steel Zinc Barrel Bolt Assortment Kit

Z4105	Z4108	Z4404	Z4406	Z4408	Z4412	Features:
3/16 Barrel Dia X 3/8" Lth with 6-32 Screw (Z4074)	3/16 Barrel Dia X 3/4" Lth with 6-32 Screw (Z4074)	1/4 Barrel Dia X 1/4" Lth (open head) with 10-24 Screw (Z4085)	1/4 Barrel Dia X 3/8" Lth with 10-24 Screw (Z4085)	1/4 Barrel Dia X 1/2" Lth with 10-24 Screw (Z4085)	1/4 Barrel Dia X 3/4" Lth with 10-24 Screw (Z4085)	 12 of the most popular Steel Zinc internal thread Combo Head Barrel Bolts
Qty: 50 Sets	Qty: 30 Sets	Qty: 30 Sets	Qty: 30 Sets	Qty: 20 Sets	Qty: 20 Sets	Easy guide to re-order
						, 0
Z4416	Z4435	Z4438	Z4440	Z4443	Z4446	 Use this Counter
1/4 Barrel Dia X	13/64 Barrel Dia	13/64 Barrel Dia	13/64 Barrel Dia	5/16 Barrel Dia X	5/16 Barrel Dia X	Display to show cus-
1" Lth with	X 1/4" Lth with	X 1/2" Lth with	X 3/4" Lth with	1/2" Lth with	1" Lth with	tomers this hard to find
10-24 Screw	8-32 Screw	8-32 Screw	8-32 Screw	1/4-20 Screw	1/4-20 Screw	
(Z4085)	(Z4075)	(Z4075)	(Z4075)	(Z4095)	(Z4095)	product line!
Qty: 20 Sets	Qty: 30 Sets	Qty: 30 Sets	Qty: 20 Sets	Qty: 20 Sets	Qty: 10 Sets	

Steel Zinc Combo Head Barrel Bolt Assortment Kit Order # Z4403-KIT

Features:

- 12 of the most popular 18-8 St/St internal thread Combo Head Barrel Bolts
- Easy guide to re-order
 Use this Counter Display to show customers this hard to find product light
- hard to find product line!
 MOST ITEMS ALSO AVAILABLE IN TYPE 316 STAINLESS STEEL— FROM OUR STOCK











SPECIAL ORDERS AVAILABLE— Small Quantities to Large Volume



